

CITIZEN

Miyano

BNC42

Fixed Headstock Type CNC Automatic Lathe



We have updated the concept for the BNC, a renowned machine in the Miyano range in response to customer demand for a compact bar/chucking lathe. While keeping the idea of a space-saving, compact design, we have improved the performance with better ease of use.

The hardware is based on the “highly rigid bed with platform construction” that has an established reputation under the Miyano brand, combined with hand-scraped box slideways adopted for all the axes to achieve powerful cutting with excellent rigidity and damping characteristics. With a turret featuring the “half-indexing mechanism” for increased number of tools, and high-torque revolving tools. The construction gives a real sense of the high level of the basic performance.

As for the software, there is a comprehensive custom menu screen including a machining support function, which makes it easy to shorten non-cutting time. Operability has also been improved.

Experience the new BNC, with its blend of evolved hardware and software.



The leftward-opening door gives the easy access for use as a chucking machine with a full height door aperture and offers convenient tool changing for the operator.








Ample tool positions

The compact 8-station turret is equipped with the half-indexing mechanism, which makes it possible to mount tools at a maximum of 16 positions when it is used, so you will never feel short of tools.

Tailstock for machining long workpieces

A hydraulically driven tailstock capable of alignment in the X and Y directions permits the machining of workpieces up to 175 mm* long.

*Restrictions apply depending on the chuck.
JPN34, B&S#22D, 5" power chuck ... 175 mm, DIN173E ... 160 mm, H-S20 ... 150 mm

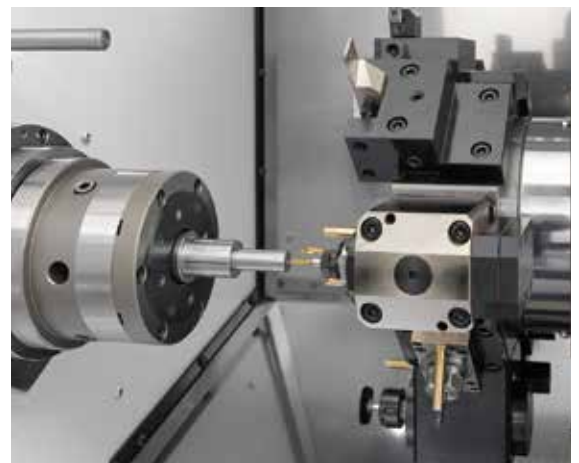

Machines with a double spindle driven holder.



Multi-tool holders are available in both fixed and driven types.




Tailstock (live center, MT2)

Basic configuration

The bed that is the basis for everything else has been given a platform-like surface table structure. Distortion of the unit mounting faces by the effects of heat is minimized and all displacements are perpendicular to the mounting faces, so relative deviations between the workpiece and cutting tools are held in check.


Hand scraped box slideways have been adopted on all axes. These slideways with face contacts have exceptional rigidity and damping characteristics, enable powerful cutting, with exceptional tool life.

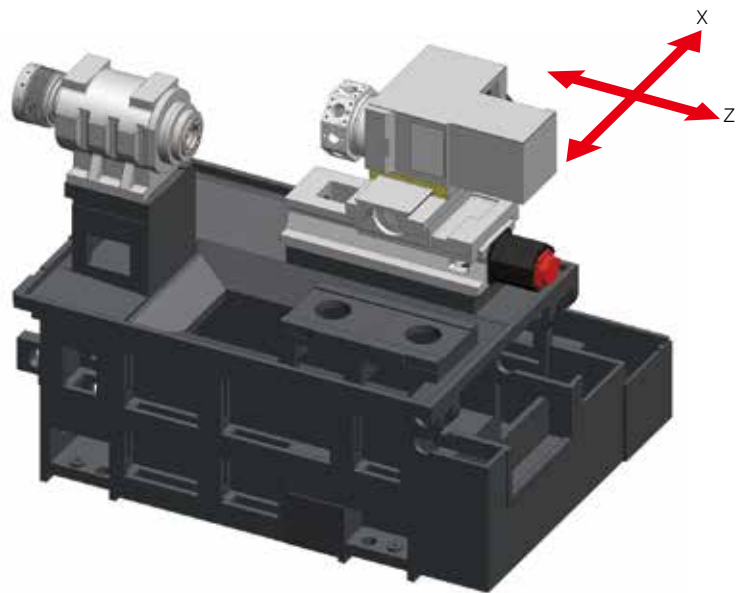

Shortened cycle times

Equipping the turret with the half-indexing mechanism, speeding up the rapid traverse rate and improving the calculation processing capability of the NC have realized shorter cycle times.


Cycle times can be shortened even further through combination with machining support functions.

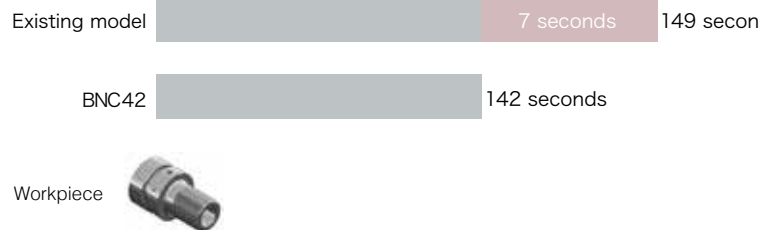

Spindle speed attainment level changing function

This is a machining support function for shortening non-cutting time in rough machining and thread cutting by setting the spindle speed attainment level as required with a command in a program, and starting the cutting block before the spindle speed reaches the value specified by the command to shorten the waiting time until cutting starts.

Case where the spindle speed attainment level is set at 60%

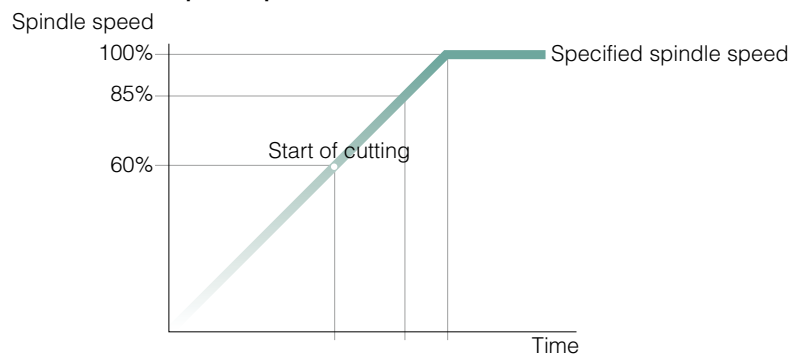


Spindle and revolving tools


Performance has been improved in comparison with the BNC-C5, with the maximum spindle speed increased to 6,000 min⁻¹, and tools with independent drive mountable at all positions offering a maximum torque of 16 Nm and maximum rotational speeds of 5,000 min⁻¹.

The abnormal load detection function is featured too: When an excessive load of greater than 95% of the maximum motor torque is applied, this function stops the program after the completion of the current cycle, prolonging the life of the drive system.

SP1 Torque diagram

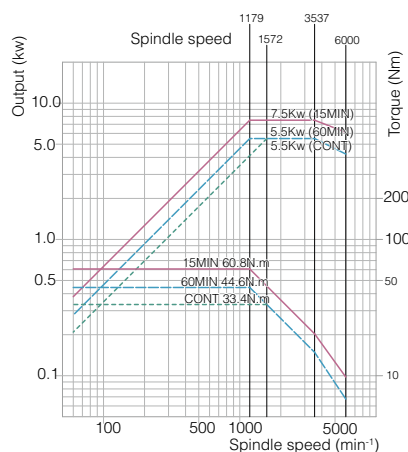

Revolving tool torque diagram

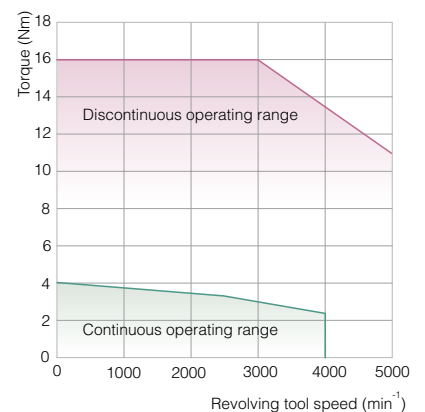

Options



In-machine Loader

A loader and conveyor type workpiece stocker are combined to achieve the perfect unmanned operation solution for small-lot production.

Maximum conveyable size	42×60 mm dia.
Maximum conveyable workpiece weight	700 g
Z axis stroke	450 mm
Z axis maximum speed	700 mm/ s
Loading time	5 seconds*

* There are differences in effects depending on materials and cutting conditions



Cut-off confirmation

Workpieces are cut off in a simple operation.

Part catcher

Catches workpieces without damaging them and transfers them to the part conveyor.



Part conveyor

Discharging finished workpieces out of the machine.



Chip conveyor

Ejects chips smoothly. Various types are available to suit the application.



Bar feeder

A range of barfeeders is available for short or long bars.

Support screens

The functions convenient for machining and checking can be called in one-touch operations.



Start condition

Displays information on the start conditions for automatic running.

Spindle and revolving tool unit

Allows you to set the rotational speed (in manual operation) of the spindle and revolving tools, and to set the spindle override.

Cycle time

Allows you to measure the cutting time, non-cutting time and running time in each cycle.

Tool counter

Informs you of the timing (count-up) for tool changes in accordance with the set tool counter stop value. You can also enter wear offsets.

Manual operation

Displays the zero point lamp status and the machine coordinate of each axis.

Option devise

Used to select an auxiliary device (option) such as a part catcher to be operated manually.

Maintenance

Used to turn the settings for maintenance ON and OFF.

Automatic running monitor (Spindle/ revolving tools)

Allows you to check the status of the spindle during automatic running.

Automatic running monitor (Axis)

Allows you to check the status of the feed axes during automatic running.




Automatic running monitor (Setting)

Allows you to check the status of the machine lock.

Automatic running monitor (State)

Allows you to check the status of the machining conditions during automatic running.



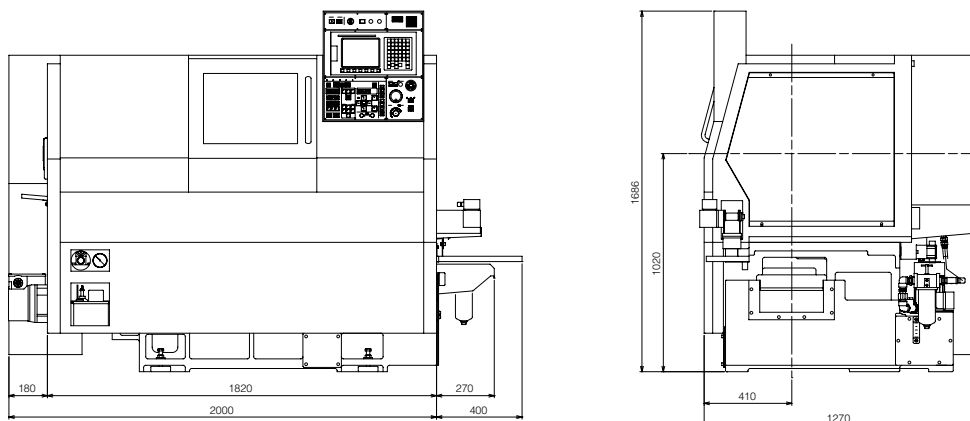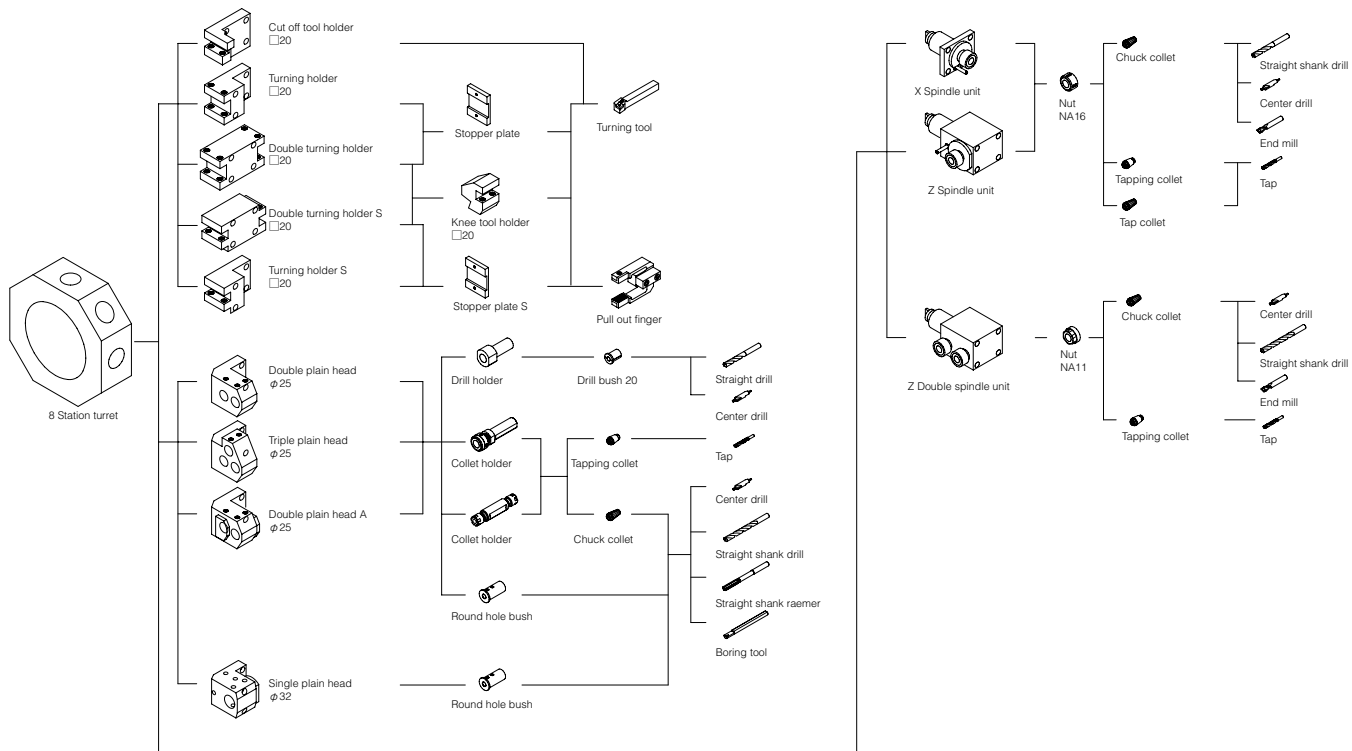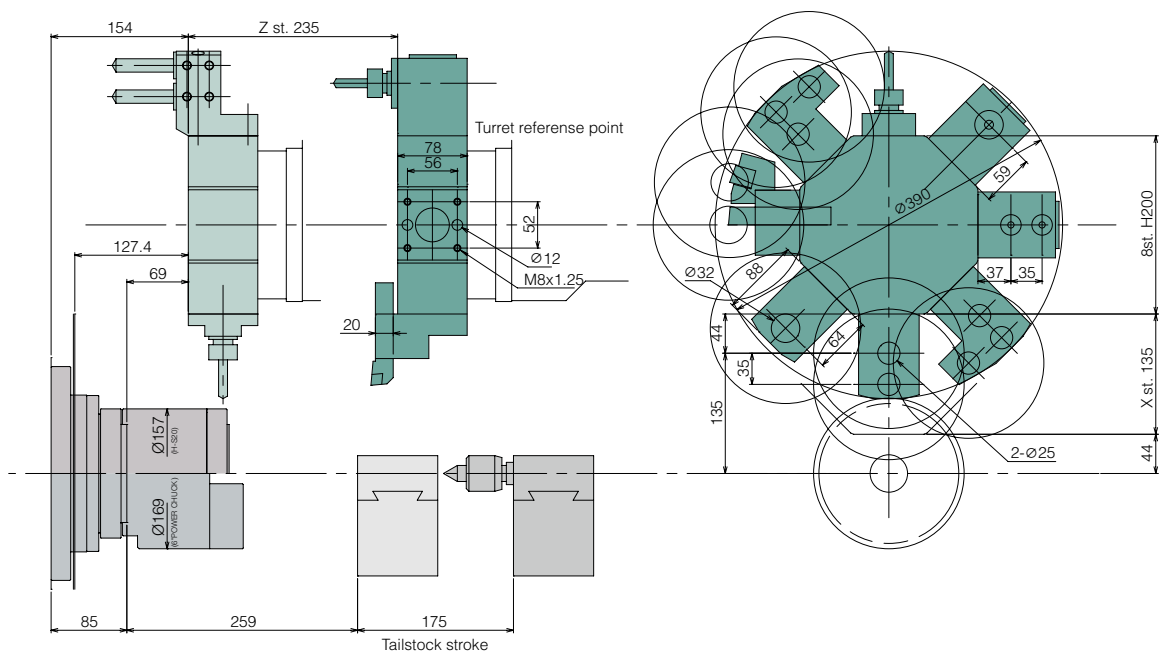

Machine specifications

Item		BNC-42C
Machining capacity		
Max. work length		175mm*
Max. machining diameter of bar work	SP1	42mm Dia.
Spindle		
Number of spindle		1
Spindle speed range	SP1	60 - 6,000min ⁻¹
Inner diameter of draw tube	SP1	43mm Dia.
Collet chuck type	SP1	Hardinge S20, DIN173E, B&S#22D, JPN34
Power chuck type	SP1	5", 6" thru-hole chuck
Turret		
Type of turret	HD1	8ST.
Shank size of turning tool		20mm Sq.
Diameter of sleeve holder		25mm Dia. , 32mm Dia.
Slide stroke	X axis	135mm
	Z axis	235mm
Rapid feed rate	X axis	20m/min
	Z axis	20m/min
Revolving tool		
Number of revolving tools		Max. 8
Type of revolving tools		Single clutch
Tool spindle speed range		50 - 5,000min ⁻¹
Machining capacity	Drill	Max. 10mm Dia.
	Tap	Max. M6×1 (S45C)
		M8×1.25 (Spiral tap and point tap only)
		Max. M8×1.25(BSBM)
Tailstock (option)		
Max.slide stroke		175mm
Live center size		MT2
Max.slide force		4.3KN (at 3.4MPa)
Motors		
Spindle drive	Cs	7.5/5.5kw (15min./cont)
Revolving tool drive		2.8/1.0kw
Coolant pump		0.18kw
High pressure coolant drive		1.0/0.6kw (60/50Hz)
Tank capacity		
Hydraulic oil tank capacity		7L
Lubricating oil tank capacity	2L	
Coolant tank capacity		165L
Machine dimentions		
Machine height		1,686mm
Floor space		W2,272×D1,270mm
Machine weight		2,400kg
Option		
Spindle air blow, High pressure coolant, Coolant level swich, Counter, Signal tower,		
Automatic fire- extinguishing equipment, Automatic power shut-off, Revolving tool, Tailstock,		
Chip conveyor, Chip box, Part catcher, Part conveyor, Cut-off confirmation		
Drill breakage detector. Foot switch, RS-232C		

*Restrictions apply depending on the chuck.
JPN34, B&S#22D, 5" power chuck ... 175 mm, DIN173E ... 160 mm, H-S20 ... 150 mm

[illegible]

CITIZEN MACHINERY CO., LTD.

JAPAN	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5901	FAX.81-267-32-5908
SOUTH ASIA / KOREA	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5916	FAX.81-267-32-5928
TAIWAN	CINCOS MIYANO TAIWAN CO.,LTD. 10Fl., No.174, Fuh Sing N. Rd., Taipei, TAIWAN	TEL.886-2-2715-0598	FAX.886-2-2718-3133
CHINA	CITIZEN (CHINA) PRECISION MACHINERY CO.,LTD. 10058, XINHUA ROAD OF ZHOUCUN, ZIBO, SHANDONG, P.R. CHINA	TEL.86-533-6150560	FAX.86-533-6161379
EUROPE-Germany	CITIZEN MACHINERY EUROPE GmbH Mettinger Strasse 11, D-73728 Esslingen, GERMANY	TEL.49-711-3906-100	FAX.49-711-3906-106
EUROPE-UK	CITIZEN MACHINERY UK LTD 1 Park Avenue, Bushey, WD23 2DA, UK	TEL.44-1923-691500	FAX.44-1923-691599
EUROPE-Italia	CITIZEN MACCHINE ITALIA s.r.l. Via Campo Romano 11/13 - 24050 Spirano (BG), ITALY	TEL.39-035-877738	FAX.39-035-876547
AMERICA	MARUBENI CITIZEN-CINCOS INC. 40 Boroline Road Allendale, NJ 07401, U.S.A.	TEL.1-201-818-0100	FAX.1-201-818-1877

URL:<http://cmj.citizen.co.jp/>

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN.

PRINTED IN JAPAN JUN. 2015

CITIZEN