


CITIZEN

**Miyano**

**BNE51MSY**

Fixed Headstock Type CNC Automatic Lathe



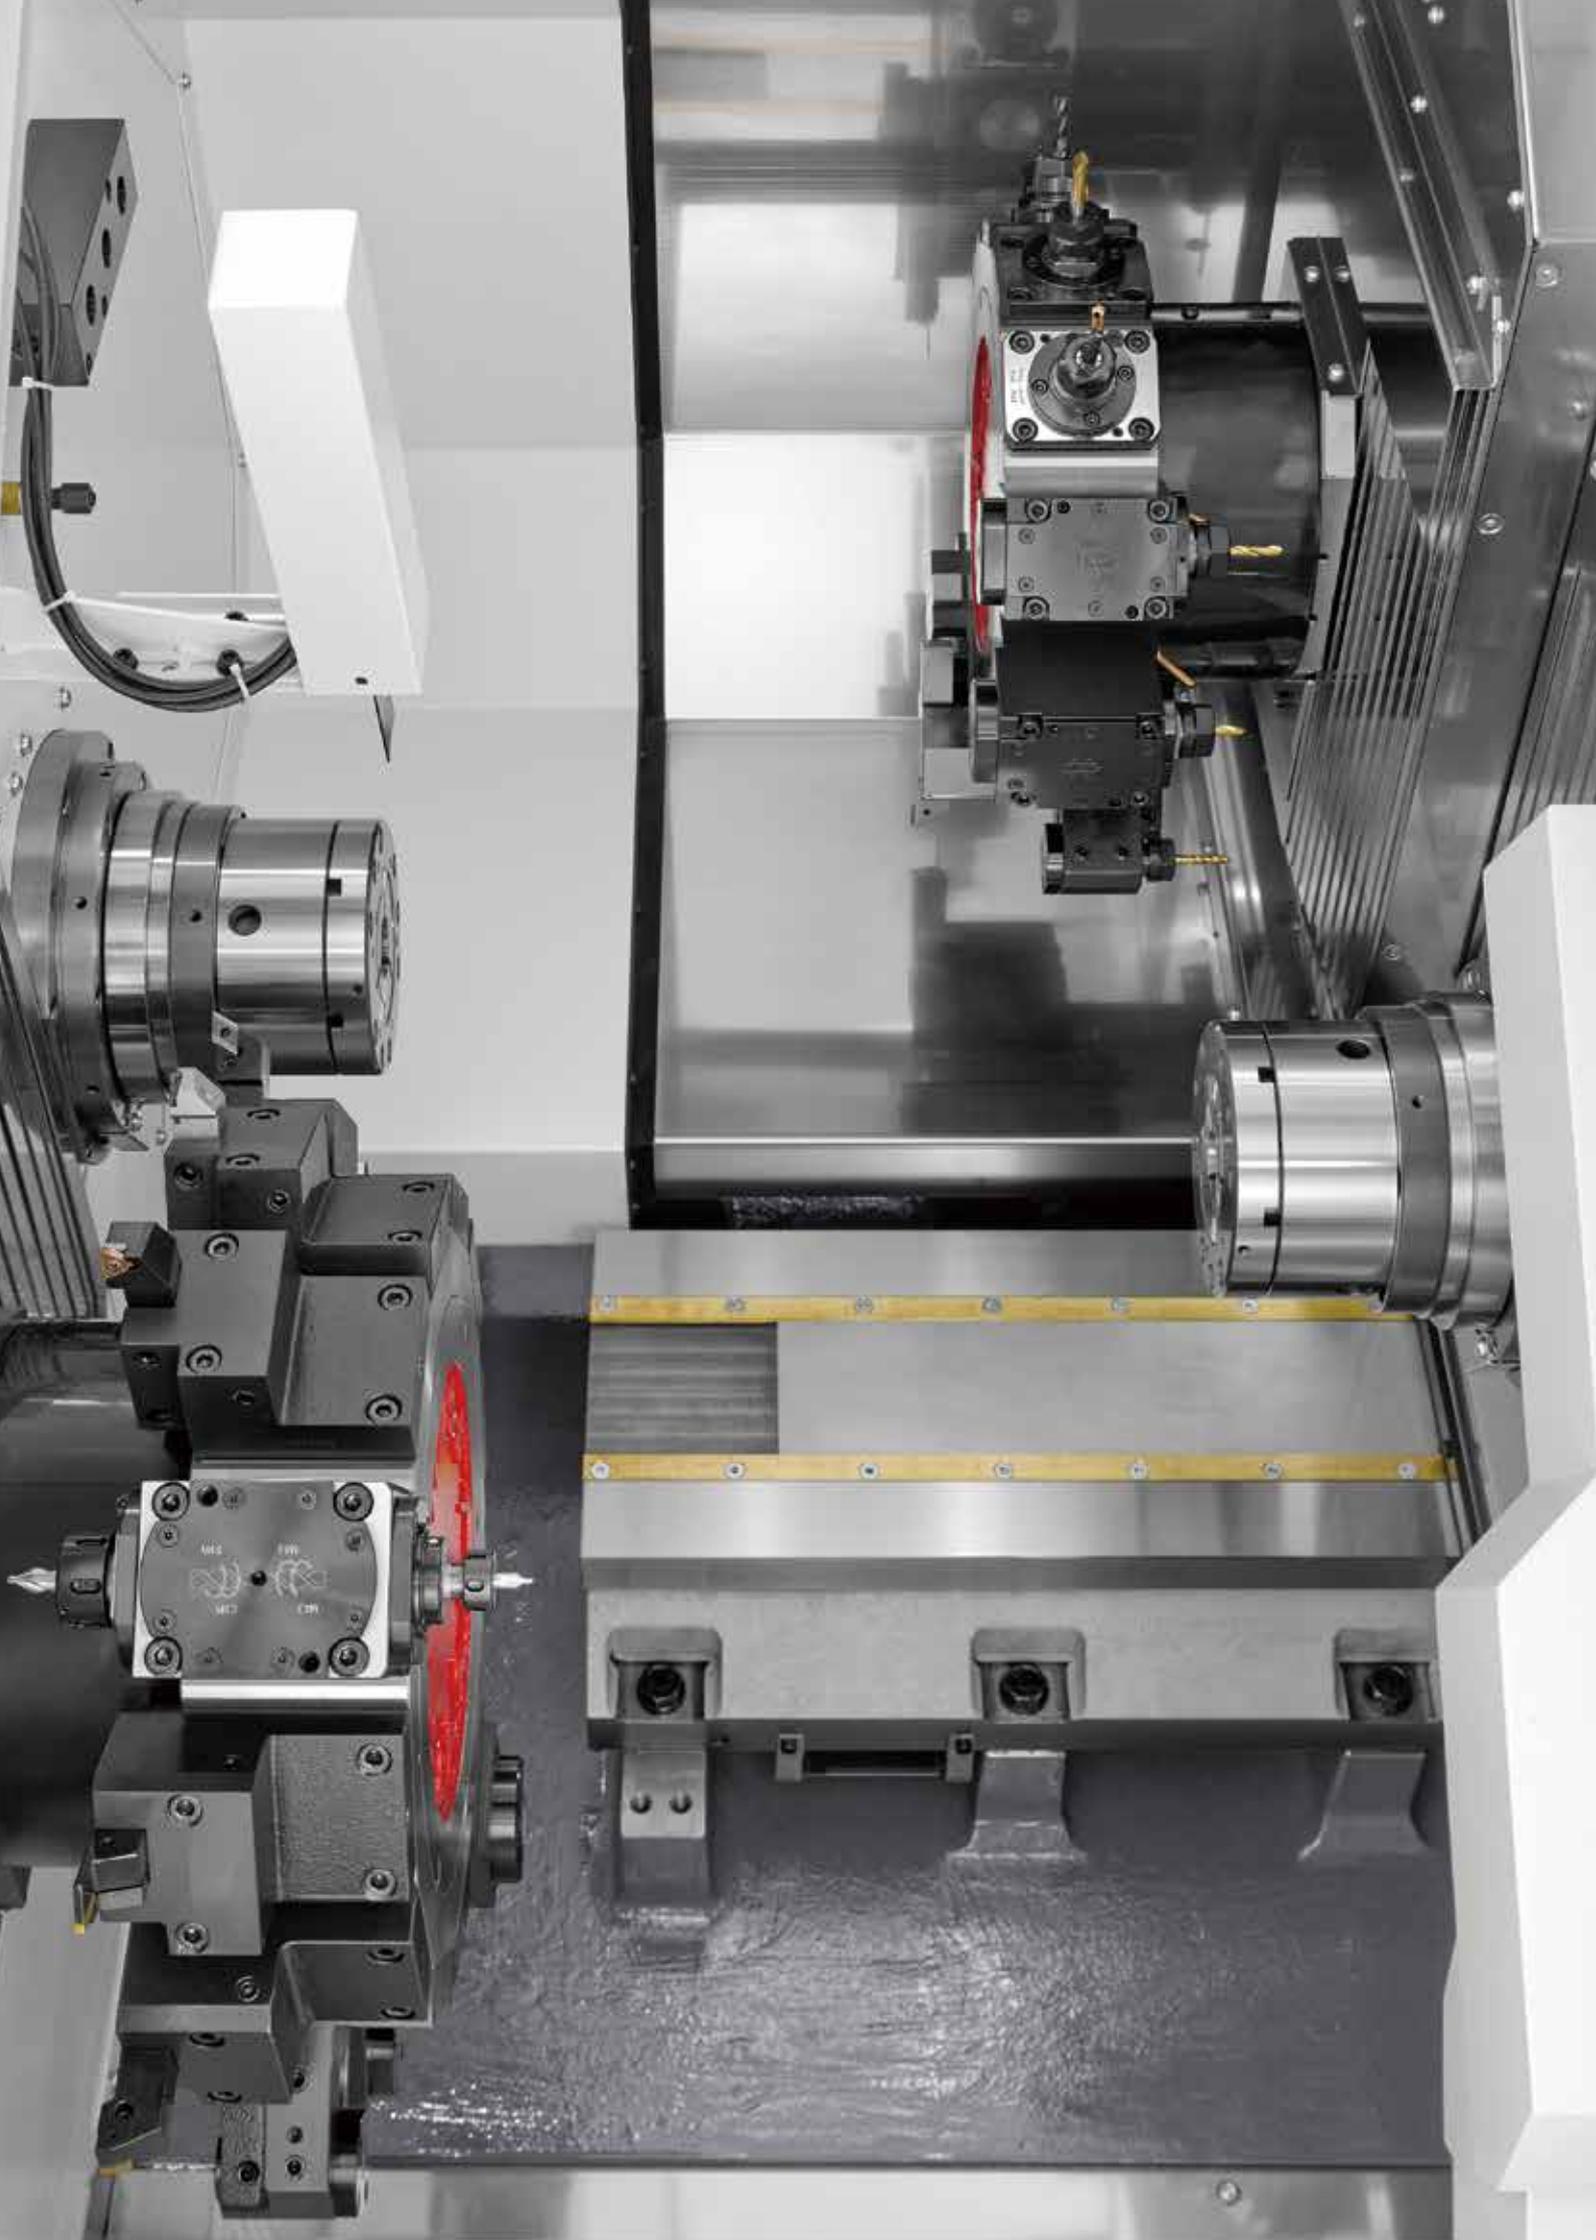


# MSY


The BNE series is renowned for its high rigidity, heavy cutting capability and outstanding precision. The new MSY model extends the ability of the BNE series with the adoption of X3 axis on the back spindle (SP2) and synchronized / superimposed control for 3-tool simultaneous machining. Faster cycle times, outstanding easy-of-use and the ability to machine complex work pieces is the result.



## Machine structure

The basic construction of the machine, that is the combination of the highly rigid precision scraped square guideways and the heavy slanted bed cast in one piece, is the base to support high precision, heavy cutting and long tool life even in complex machining.

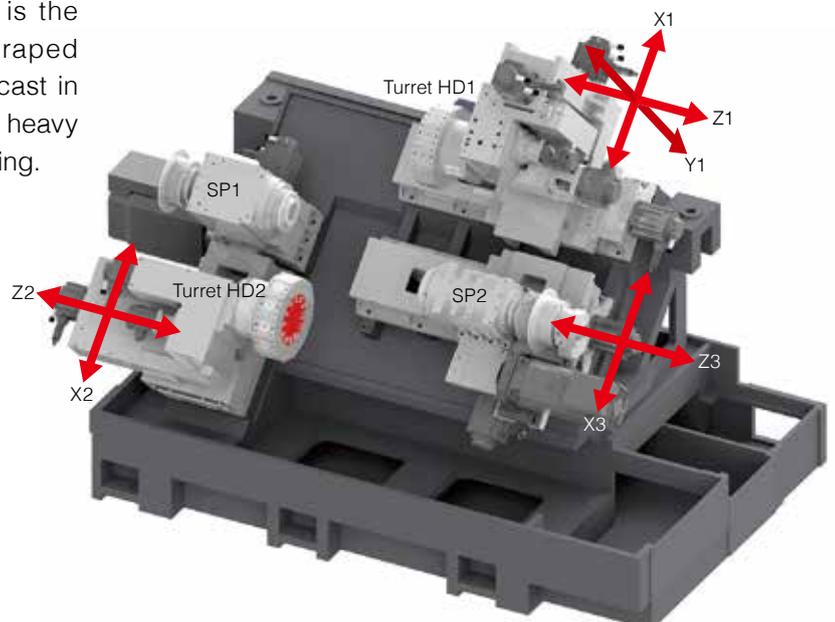

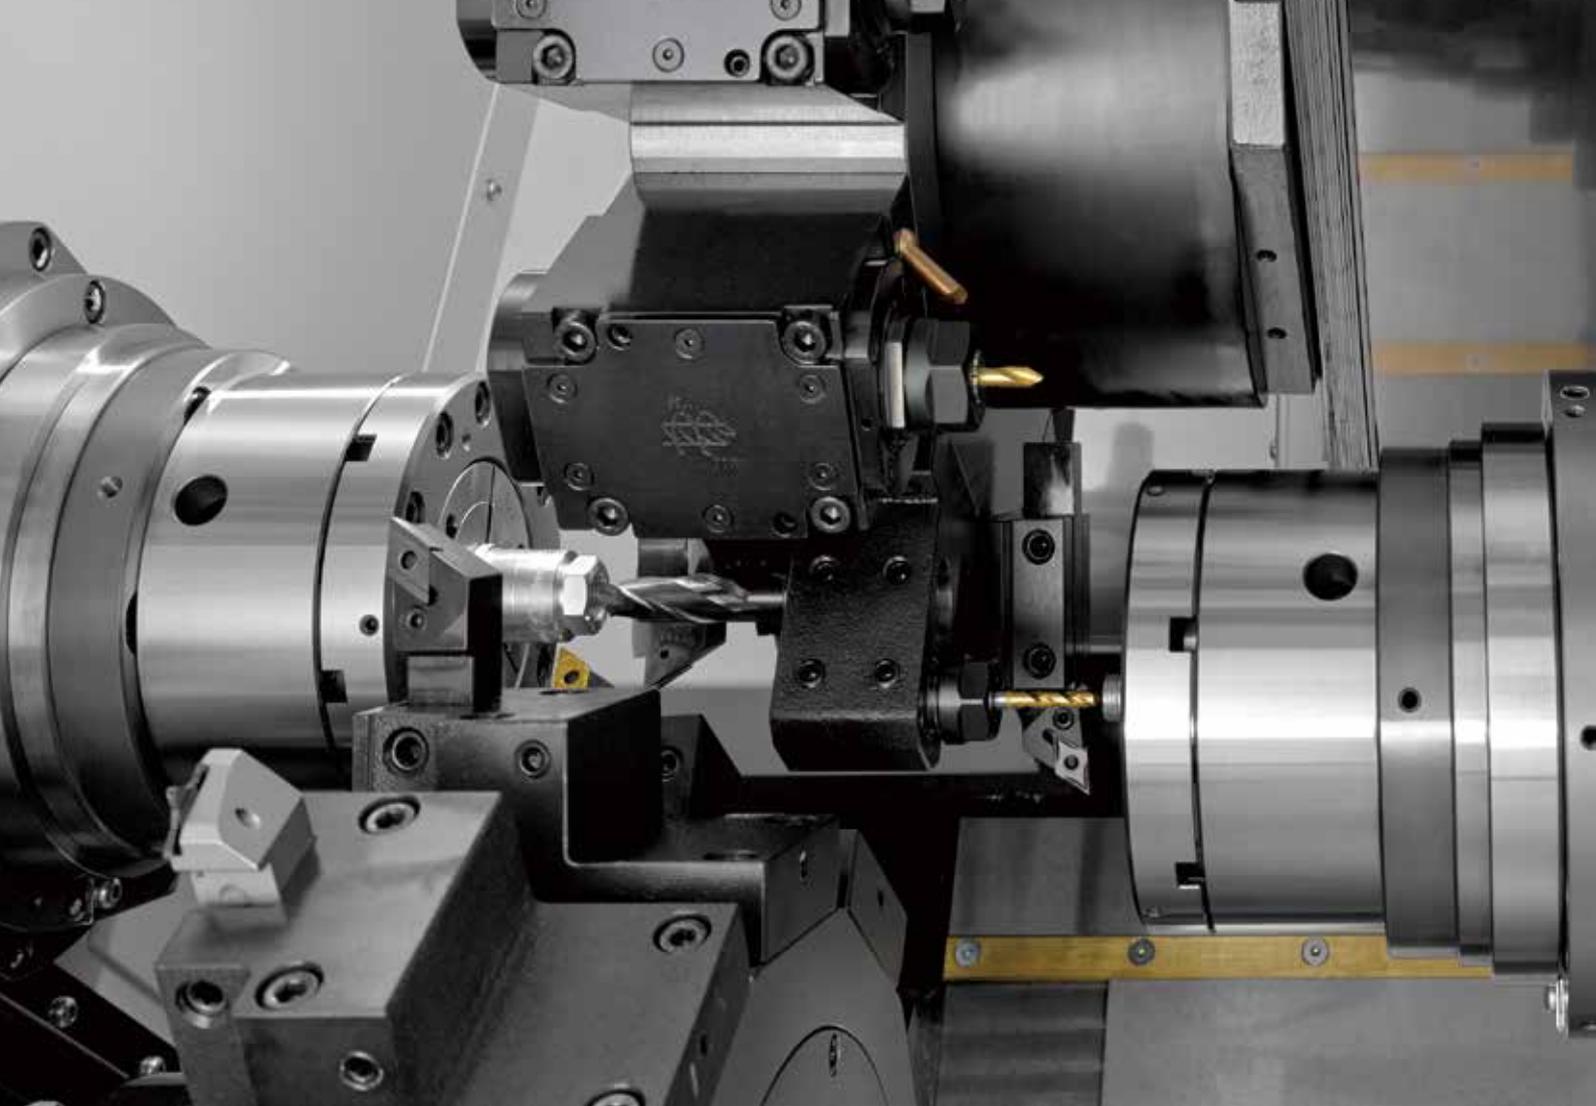


Examples of simultaneous machining with three tools

## Turret

Indexing by a large-diameter curvic coupling, secure hydraulic turret clamping and rugged square guideways assure high precision and long life of the turret without compromise. This turret can accommodate revolving tools with a high machining torque of 20 Nm at all 12 positions.

Our unique tool holder mounting method using two guide pins makes it easy to mount and remove tool holders and ensures exceptionally high re-mounting accuracy.

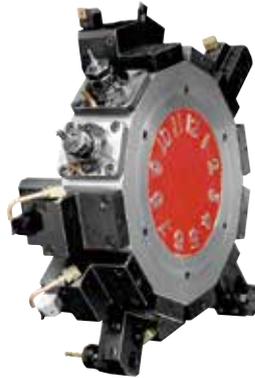


Tool holder using two guide pin mounting method

## Spindle

A combination of “precision double-row cylindrical roller bearings” and “precision angular contact ball bearings” suppresses radial run-out and thermal displacement in the longitudinal direction as well as providing high rigidity.

Cross section of spindle

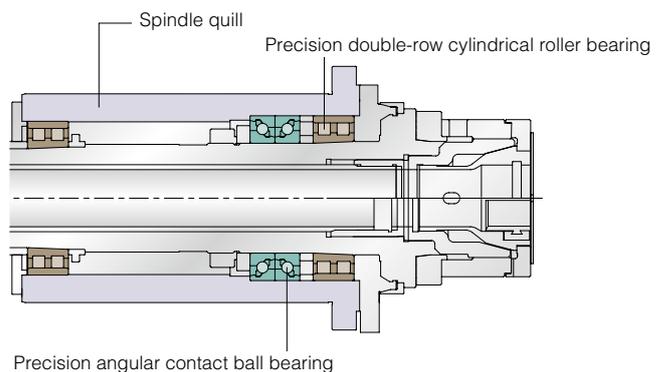




Examples of simultaneous machining with two tools

## Comprehensive machining patterns


Equipping SP2 with an X3-axis has enabled simultaneous hole machining on both end faces, which was not possible on conventional BNE models.

In addition, superimposition control allows simultaneous cutting with two tools by synchronizing the cutting at SP2 with the cutting at SP1, and also simultaneous cutting with three tools including SP2, helping to shorten cycle times. So a full range of machining variations is offered.


### ■ Simultaneous machining of 3 tools

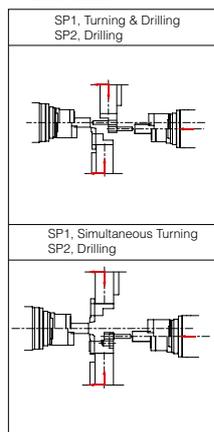

### ■ Simultaneous machining of 2 tools

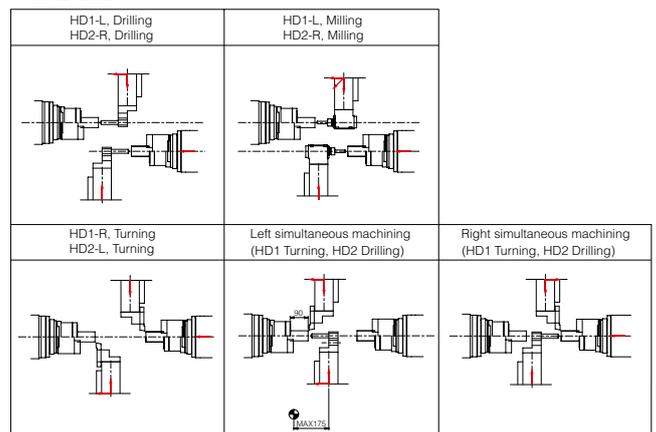


## Convenient operation

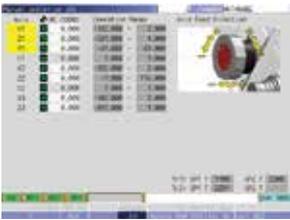



### HMI (Human Machine Interface) is adopted

Graphics displayed for each item and screens that display all the necessary information in one place greatly improve operating convenience.

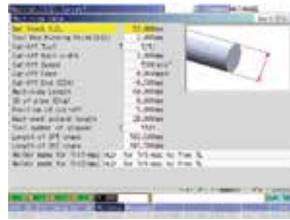



### Machining data screen

All you have to do is input the machining length, chucking length and so on, and the escape and approach positions are automatically calculated. This is useful for collision prevention and shortening setup times.

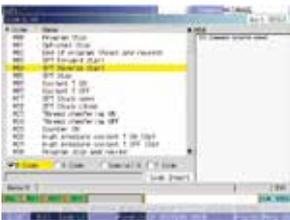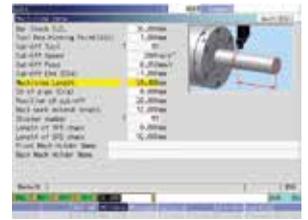

### Support for programming

The function displays the list of G and M codes including explanations of the arguments. Canned drilling cycle is designed by dialogue form to support programming.

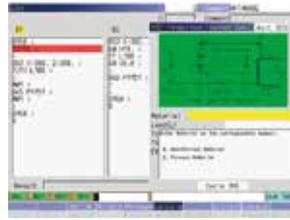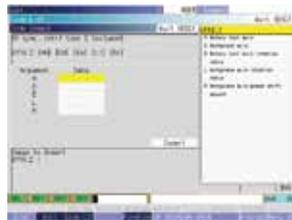

### Calculation function

Programs for canned cycles etc. can be created in the conversational style.



### Easy-to-view edit screen

The coordinate calculation function and calculator function incorporated in the NC unit can be used for complex intersection point calculations.



## Options



### Part catcher

Discharges workpiece on to conveyor.



### Revolving tools

Ensures high-power, stable milling at a torque of 20 Nm. Furthermore, a powerful 25Nm motor for revolving tools is available.



### Drill breakage detector

Drill breakage is detected by the swing cylinder. The machine stops when breakage is detected.



### Cut-off confirmation

This is a function to confirm that cut-off of the workpiece is completed.



### Bar loader/ Bar feeder

A choice of Barloaders (max bar length ≈ 1m) or Barfeeders (max bar length ≈ 3.6m are available.)



# Machine specifications

Item	BNE-51MSY	
<b>Machining capacity</b>		
Maximum work length		90 mm
Maximum bar diameter	SP1	φ51 mm
	SP2	φ51 mm
<b>Spindle</b>		
Number of spindles		2
Spindle speed	SP1	5,000 min <sup>-1</sup>
	SP2	5,000 min <sup>-1</sup>
Spindle nose	SP1	A2-6
	SP2	A2-6
Draw tube Dia.	SP1	φ52
	SP2	φ52
Type of collet chuck	SP1	H-S22/ DIN177E
	SP2	H-S22/ DIN177E
Power chuck size and type	SP1	6" (φ169)
	SP2	6" (φ169)
<b>Turret</b>		
Number of turret		2
Turret stations	HD1	12 ST.
	HD2	12 ST.
Shank size of square turning tool		20 mm Sq.
Diameter of drill shank		φ25 mm
<b>Revolving tool</b>		
Number of revolving tools		Max.12+12
Type of revolving tools		Single clutch
Tool spindle speed range		Max. 6,000 min <sup>-1</sup>
<b>Feed rate</b>		
Rapid feed rate	X1 axis	18 m/ min
	Z1 axis	20 m/ min
	Y1 axis	12 m/ min
	X2 axis	16.2 m/ min
	Z2 axis	18 m/ min
	X3 axis	18 m/ min
	Z3(B) axis	20 m/ min
	Slide stroke	X1 axis
Z1 axis		380 mm
	Y1 axis	80 (±40) mm
	X2 axis	195 mm
	Z2 axis	175 mm
	X3 axis	155 mm
	Z3(B) axis	450 mm
	<b>Motors</b>	
Spindle motor	SP1	15/ 11 kw (15min./ cont)
	SP2	7.5/ 5.5 kw (15min./ cont)
Revolving tool motor		2.2 kw 20 Nm / 4.0kw 25Nm(op.)
Hydraulic operating motor		1.5 kw
Lubricating motor		0.023 kw
Coolant motor		0.25 kw
High-pressure coolant motor		0.8/ 1.36 kw (50/60Hz)
Turret index motor		0.7 kw
<b>Power supply</b>		
Capacity		44 KVA
Voltage		AC 200/ 220 V
Air supply		0.5 Mpa
Fuse		125 A
<b>Tank capacity</b>		
Hydraulic oil tank capacity		10 L
Lubricating oil tank capacity		4 L
Coolant tank capacity		350 L
<b>Machine dimensions</b>		
Machine height		2,050 mm
Floor space		W 2,725xD 2159mm
Machine weight		8,000 kg
<b>Optional accessories</b>		
Spindle brake, Air blow, Work ejector, Automatic fire extinguisher, Automatic power shut-off		
Chip box, Parts conveyor, Coolant level switch, High pressure coolant		
Inner high pressure coolant & air blow, Turret high pressure coolant & Air blow, Tool setter		
Parts Catcher, Parts Box, Collet chuck system, Chip conveyor, Total & preset counter		
Oil mist collector, Signal tower, Filler tube, Spindle inner bushing, Bar feeder inner bushing		
Cut-off confirmation, Parts carrier, Left over catcher, Drill checker, Drill checker touch (HD1)		
Thermo revision, 100V, Revolving tool power No.1 (25Nm).		

## NC specifications

Model device	MITSUBISHI M730VS
Command specified axes	HD1: X1, Z1, Y1,
	HD2: X2, Z2,
	SP1 : C1,
	SP2 : C2,
	SP2 Slide : X3, Z3
Auxiliary axes	HD1 Revolving tool : C3
	HD1 Revolving tool : C4
	HD1 Index T1
	HD2 Index T2
Control axis groups	3 groups
Input code	ISO
Command input system	Incremental and absolute
Tool offset data	200 pairs
Feed command system	Per rotation feed and per minute
Cutting feed rate and	Max.100%
Rapid feed override	
Zero return function	Manual zero return
On machine program check function	Manual pulse generator
Program storage capacity	512KB (1200 m)
Input/Output interface	Compact flash card slot
Spindle C-axis function	0.001°
Display devise	10.4" color LCD
<b>Standard function</b>	
Start position automatic return, Manual feed function	
Manual data input (MDI) function, Back up function	
Operation time display, Product counter display	
Cycle time check function, Automatic screen off function	
Optional block skip, Optional stop	
Constant surface speed control Cut off confirmation	
Corner chamfering/ Radius function	
Tool nose R compensation function	
Arc radius specification, Thread cutting canned cycle	
Spindle synchronizing control function	
Revolving tool synchronous tap function	
Spindle synchronizing control function, Custom macro	
Multiple canned cycles for turning, Canned cycle for drilling	
High speed program check function, Milling interpolation	
Helical Interpolation	
<b>Preparation functions</b>	
Start position automatic return, Waiting point automatic return	
Sub spindle retract return, Turret retract return	
Automatic cut-off machining function, Tool set function	
Spindle speed set function, Tool select function	
Chuck adjustment function, AUX Manual select function	
JOG operation function, Handle operation function	
Spindle speed simultaneous command for 3 spindle	
3 Sets of M code simultaneous command	
Control axis swap function, Arbitrary superposition function	
Background editing, Function to superimpose 2 pairs of axes	
<b>Editing support functions</b>	
Calculator function, Code list display, Code insert, Coordinate calculation function,	
Format check	
<b>Option</b>	
Automatic power shut-off, Thermo revision, tool setter, Eco function RS232C	

## CITIZEN MACHINERY CO., LTD.

# CITIZEN

<b>JAPAN</b>	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5901	FAX.81-267-32-5908
<b>SOUTH ASIA / KOREA</b>	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5916	FAX.81-267-32-5928
<b>TAIWAN</b>	CINCOM MIYANO TAIWAN CO.,LTD. 10FL., No.174, Fuh Sing N. Rd., Taipei, TAIWAN	TEL.886-2-2715-0598	FAX.886-2-2718-3133
<b>CHINA</b>	CITIZEN (CHINA) PRECISION MACHINERY CO.,LTD. 10058, XINHUA ROAD OF ZHOUCUN, ZIBO, SHANDONG, P.R. CHINA	TEL.86-533-6150560	FAX.86-533-6161379
<b>EUROPE-Germany</b>	CITIZEN MACHINERY EUROPE GmbH Mettinger Strasse 11, D-73728 Esslingen, GERMANY	TEL.49-711-3906-100	FAX.49-711-3906-106
<b>EUROPE-UK</b>	CITIZEN MACHINERY UK LTD 1 Park Avenue, Bushey, WD23 2DA, UK	TEL.44-1923-691500	FAX.44-1923-691599
<b>EUROPE-Italia</b>	CITIZEN MACCHINE ITALIA s.r.l. Via Campo Romano 11/13 - 24050 Spirano (BG), ITALY	TEL.39-035-877738	FAX.39-035-876547
<b>AMERICA</b>	MARUBENI CITIZEN-CINCOM INC. 40 Bordline Road Allendale, NJ 07401, U.S.A.	TEL.1-201-818-0100	FAX.1-201-818-1877

URL:<http://cmj.citizen.co.jp/>

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co., Japan.