

CITIZEN

Miyano

LX06 / 08E

CNC Lathe





We proudly introduce 6-inch and 8-inch chucking machines developed for high accuracy, demanding workpieces in medium to high volumes.

The scraped square slideways that provide high rigidity, the turret that features excellent vibration damping, the rigid spindle supported by double row cylindrical roller bearings and angular contact ball bearings, and the heavy 30° slant bed structure are essential characteristics for high accuracy and long tool life.

The high levels of rigidity are ideal for "hard turning" applications which can eliminate expensive grinding operations.



Standard Specification Machine **LX06E / LX08E**

This unit is the base for all the models, and its excellent rigidity allows not just the heavy-duty cutting you might expect, but hard turning too.



Double Hand Loader **LX06E**

A new type of loader featuring an inverting hand with a 180-degree turn function makes it possible to load workpieces regardless of their orientation during transport.



Gantry Loader **LX06E / LX08E**

This is a 2-axis NC gantry loader with one saddle and two hands. Combining an extremely high speed gantry loader with a workpiece stocker, it enables extended periods of unmanned operation.




In-machine Loader **LX06E**

A programmable NC high-speed loader and conveyor type workpiece stocker are combined to achieve the perfect unmanned operation solution for small-lot production.

Rigid Base

The 30° slant bed, which is cast in one piece, provides outstanding thermal stability thanks to smooth chip flow to minimize dimensional changes during machining, and supports high-precision machining through the closed-structure rigid body.

And precision scraped square slideways are used on all axes to increase rigidity and improve vibration damping characteristics.

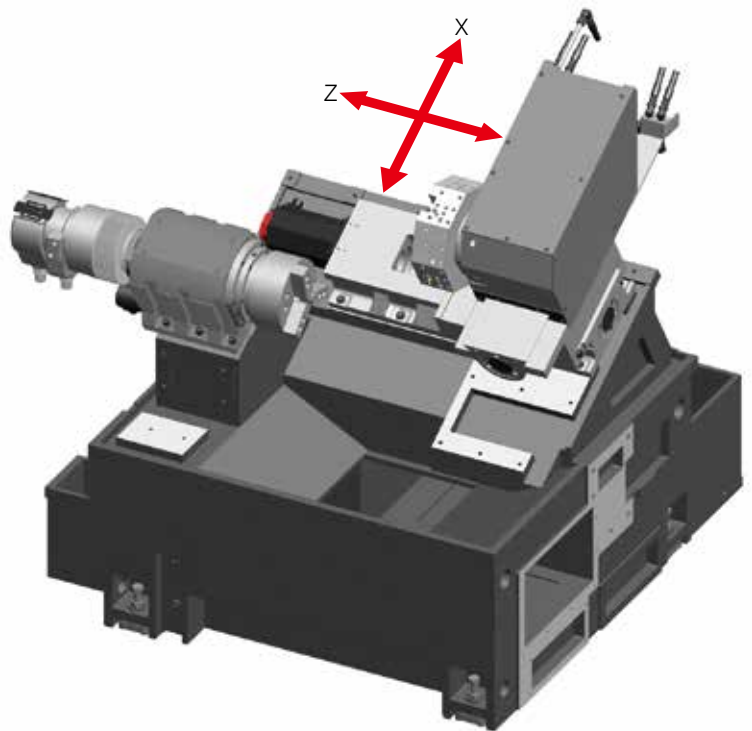


Turret

Although subject to punishing cutting forces and vibration, the highly rigid turret allows heavy cutting because 25mm square shank tools (LX08E) or 20mm square shank tools (LX06E) can be mounted directly on it and can therefore be clamped securely with a short overhang.



Spindle

Adopting double-row cylindrical roller bearings at the front and a set of angular contact ball bearings at the rear, the spindle maintains stable accuracy from the low to high speed ranges, while also achieving high rigidity.

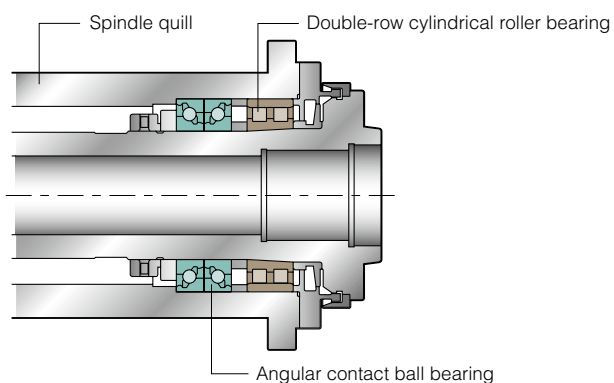



Hard Turning

"Hard turning" is a turning process for machining pre-hardened materials using CBN or ceramic tools.

Advantages of hard turning over grinding

1. Initial investment cost (machine price) is low.
2. Several grinding processes can be integrated into turning processes performed on a single NC lathe.
3. Since all machining processes including outer and inner turning, circular machining and free-form surface machining can be performed in one chucking, geometrical accuracy, such as straightness, squareness and concentricity, is considerably improved.
4. Cycle time can be reduced thanks to short loading and unloading time.
5. Dry cutting is environmentally friendly - reduced use of coolant, and recovery of resources by recycling chips instead of disposing of the sludge generated in grinding.

Machining accuracy of the LX08E

Demonstration workpiece




Material : SUJ2
Hardness : HRC 60-65


Surface roughness

O.D. : $R_z = 1.436 \mu\text{m}$
I.D. : $R_z = 0.855 \mu\text{m}$

Roundness


$0.5 \mu\text{m}$

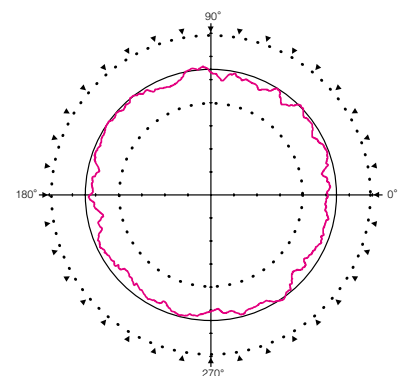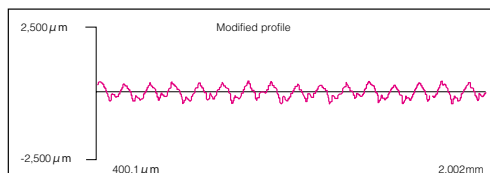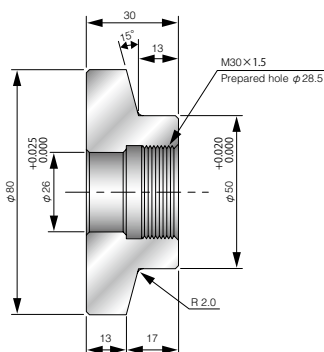

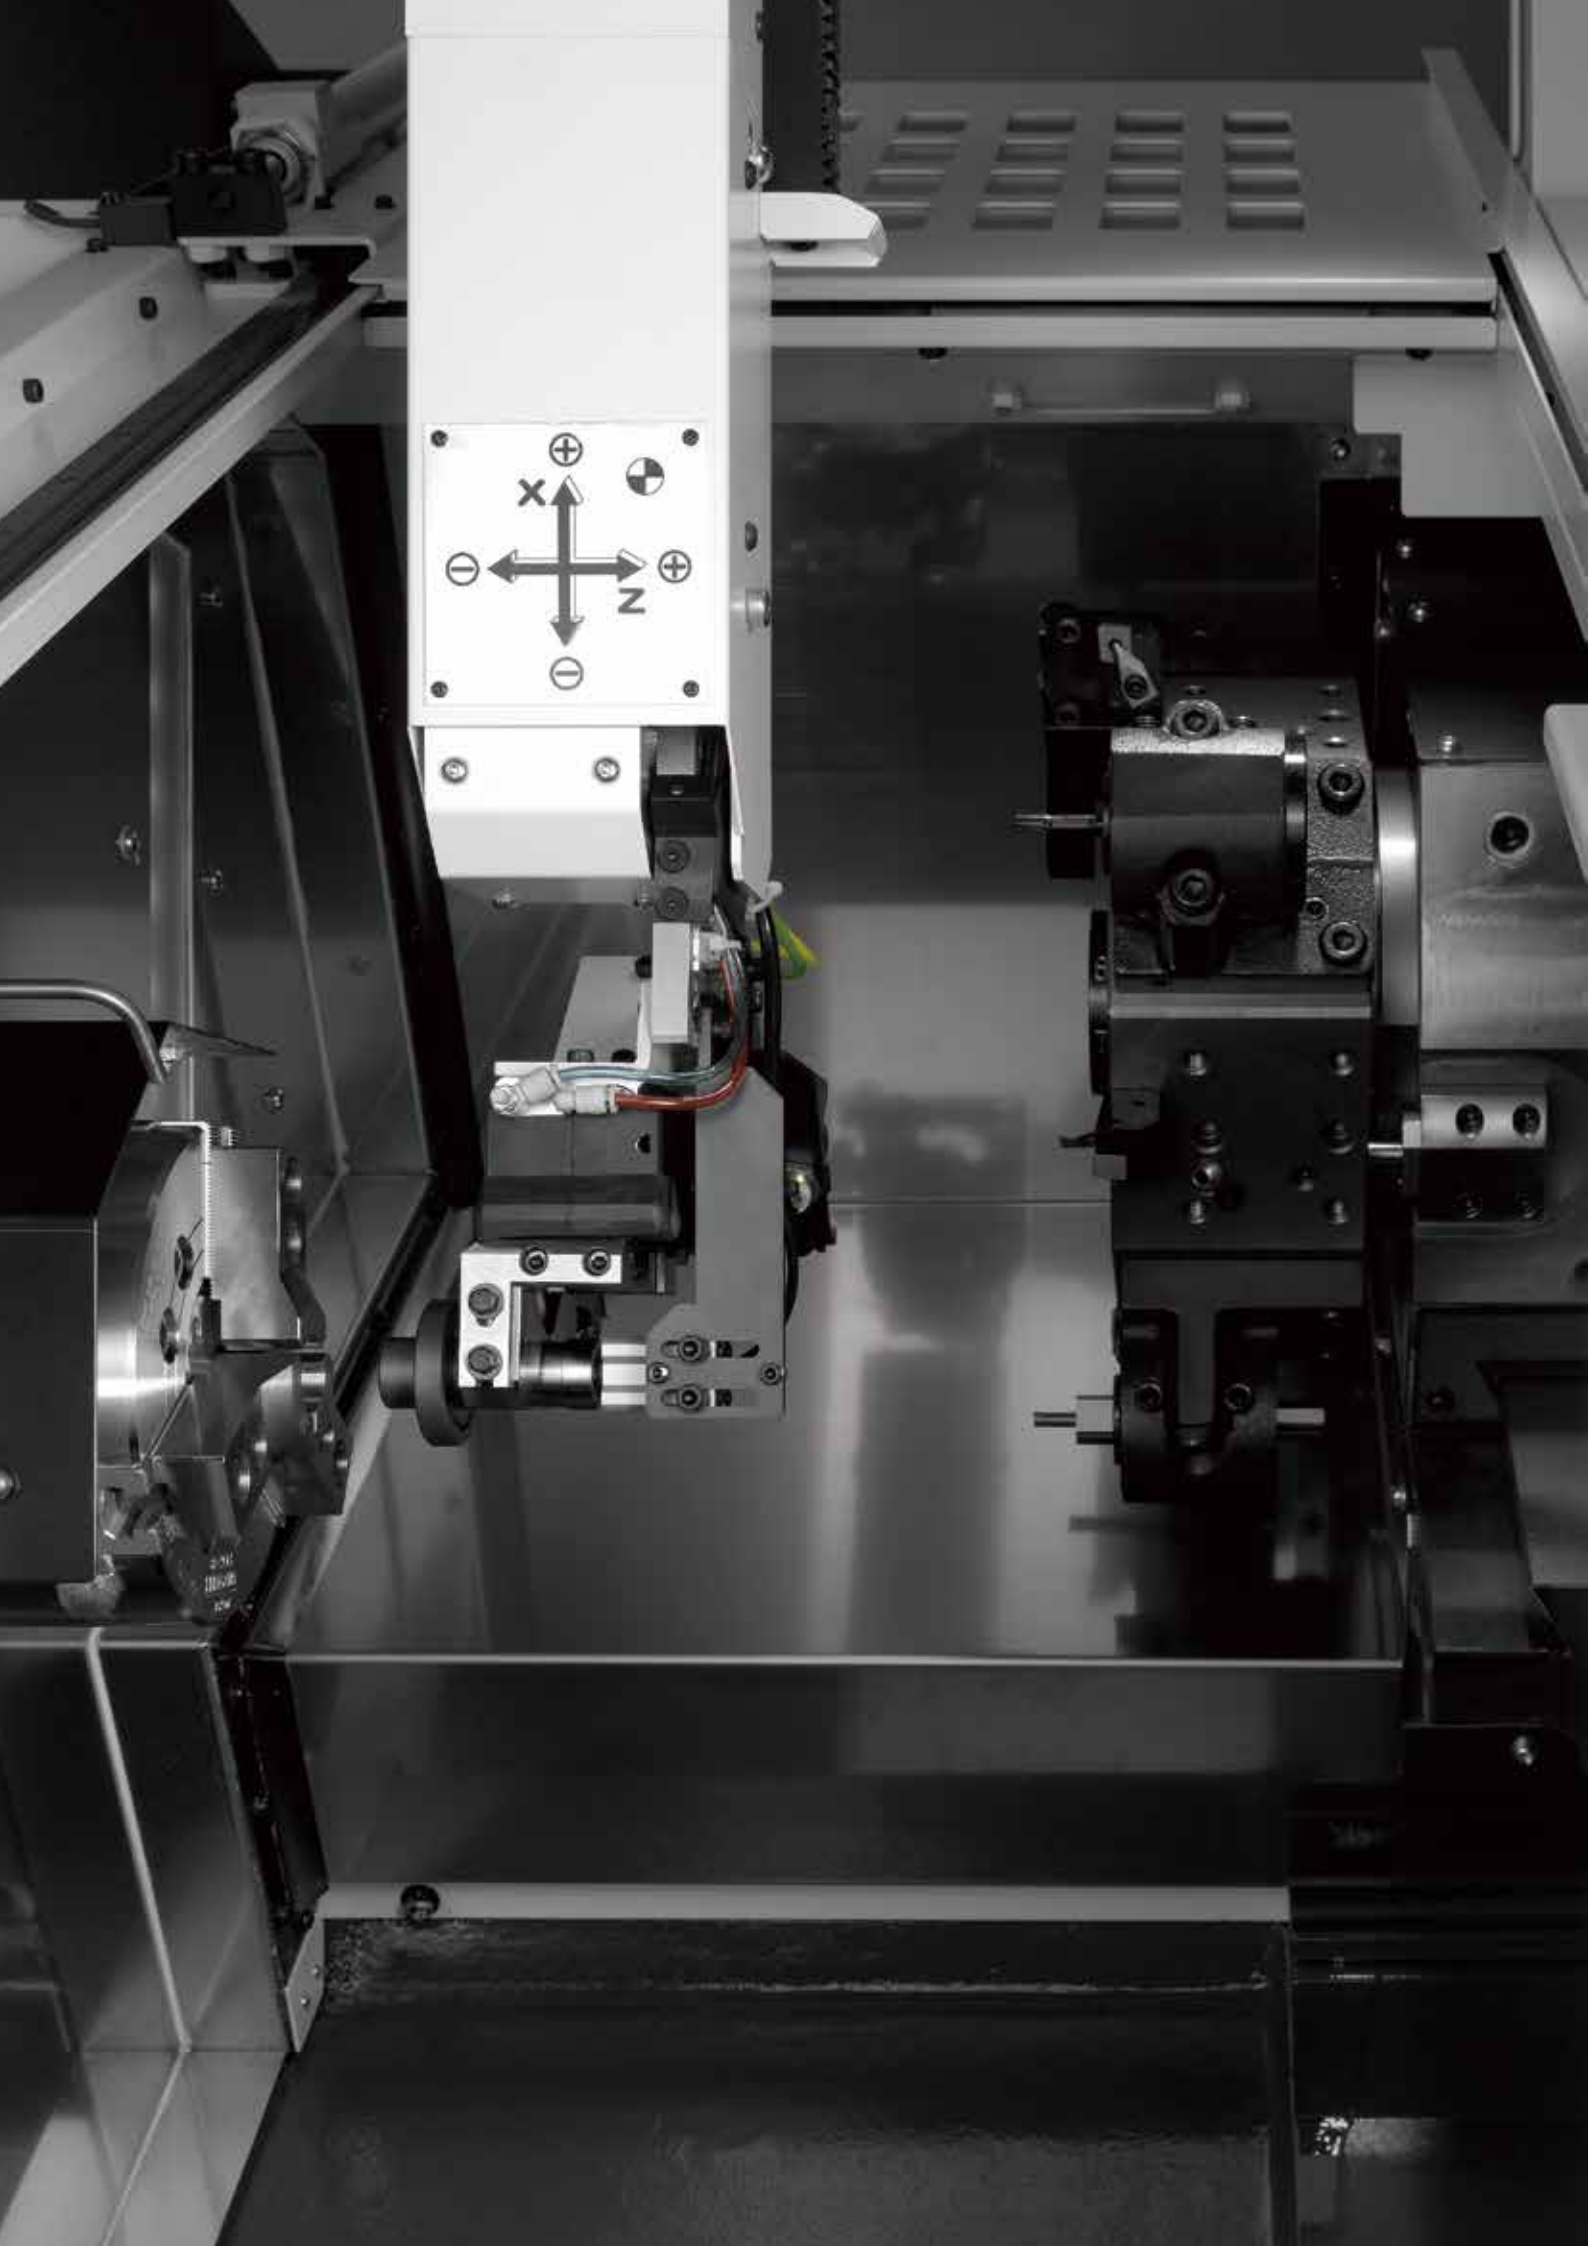


Double Hand Loader **LX06E**


Double Hand Loader

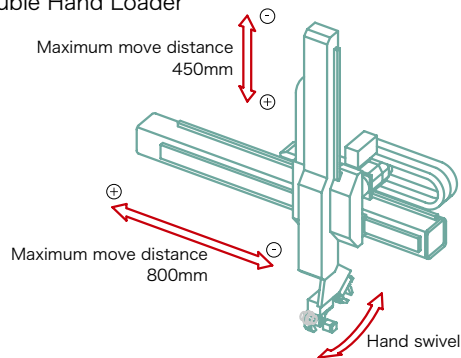

IN conveyor and inverting hand

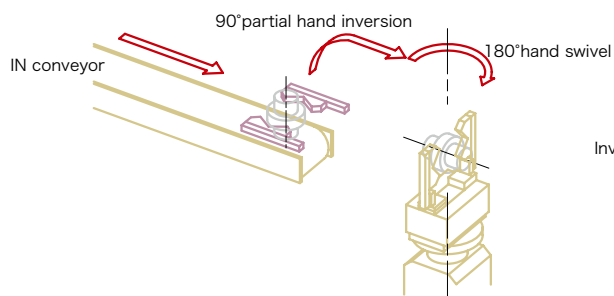

- Maximum conveyable size
- : 70 x 80 mm Dia. (flange workpiece)
- : 50 x 200 mm Dia. (shaft workpiece)
- Maximum conveyable workpiece weight
- : 1kg
- Z axis rapid traverse
- : 123 m/ min
- X axis rapid traverse
- : 90 m/ min
- Loading time
- : 9 seconds

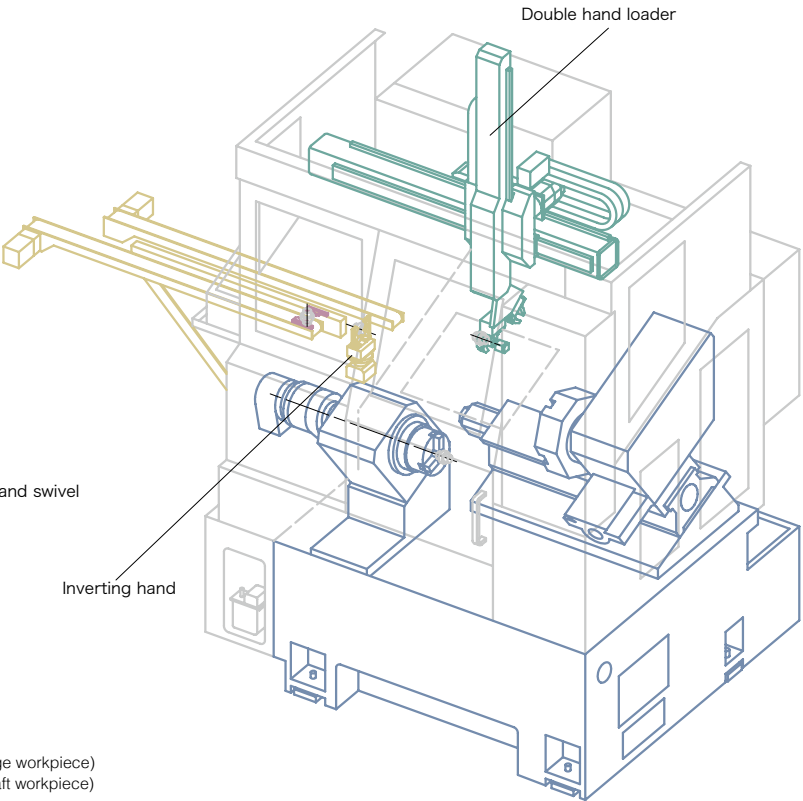

Loading with 90° partial inversion



1




2



3


Loading with 180° swivel

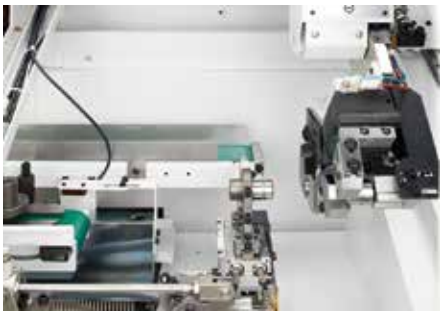

1



2

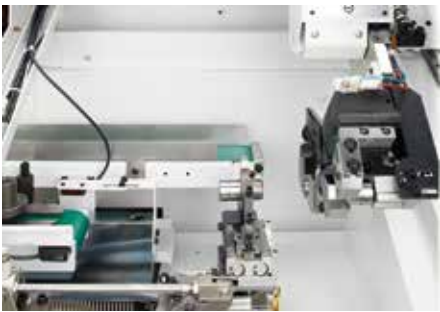


3

Loading patterns

	IN conveyor	Inverting hand, 90°	Inverting hand, 180°	Double hand loader
Flange workpiece 1	machine surface up	90° partial inversion	-	Clamps side of workpiece to be machined
Flange workpiece 2	machine surface down	90° partial inversion	180° swivel	Clamps side of workpiece to be machined
Shaft workpiece	parallel with spindle	-	-	Clamps workpiece directly from IN conveyor
* External inversion / both-side machining (flange workpieces and shaft workpieces)	-	-	180° swivel	Swivels the turning hand 180° after 1st-operation. Re-inserts the workpiece into the spindle chuck

* Restrictions may apply depending on the workpiece shape.

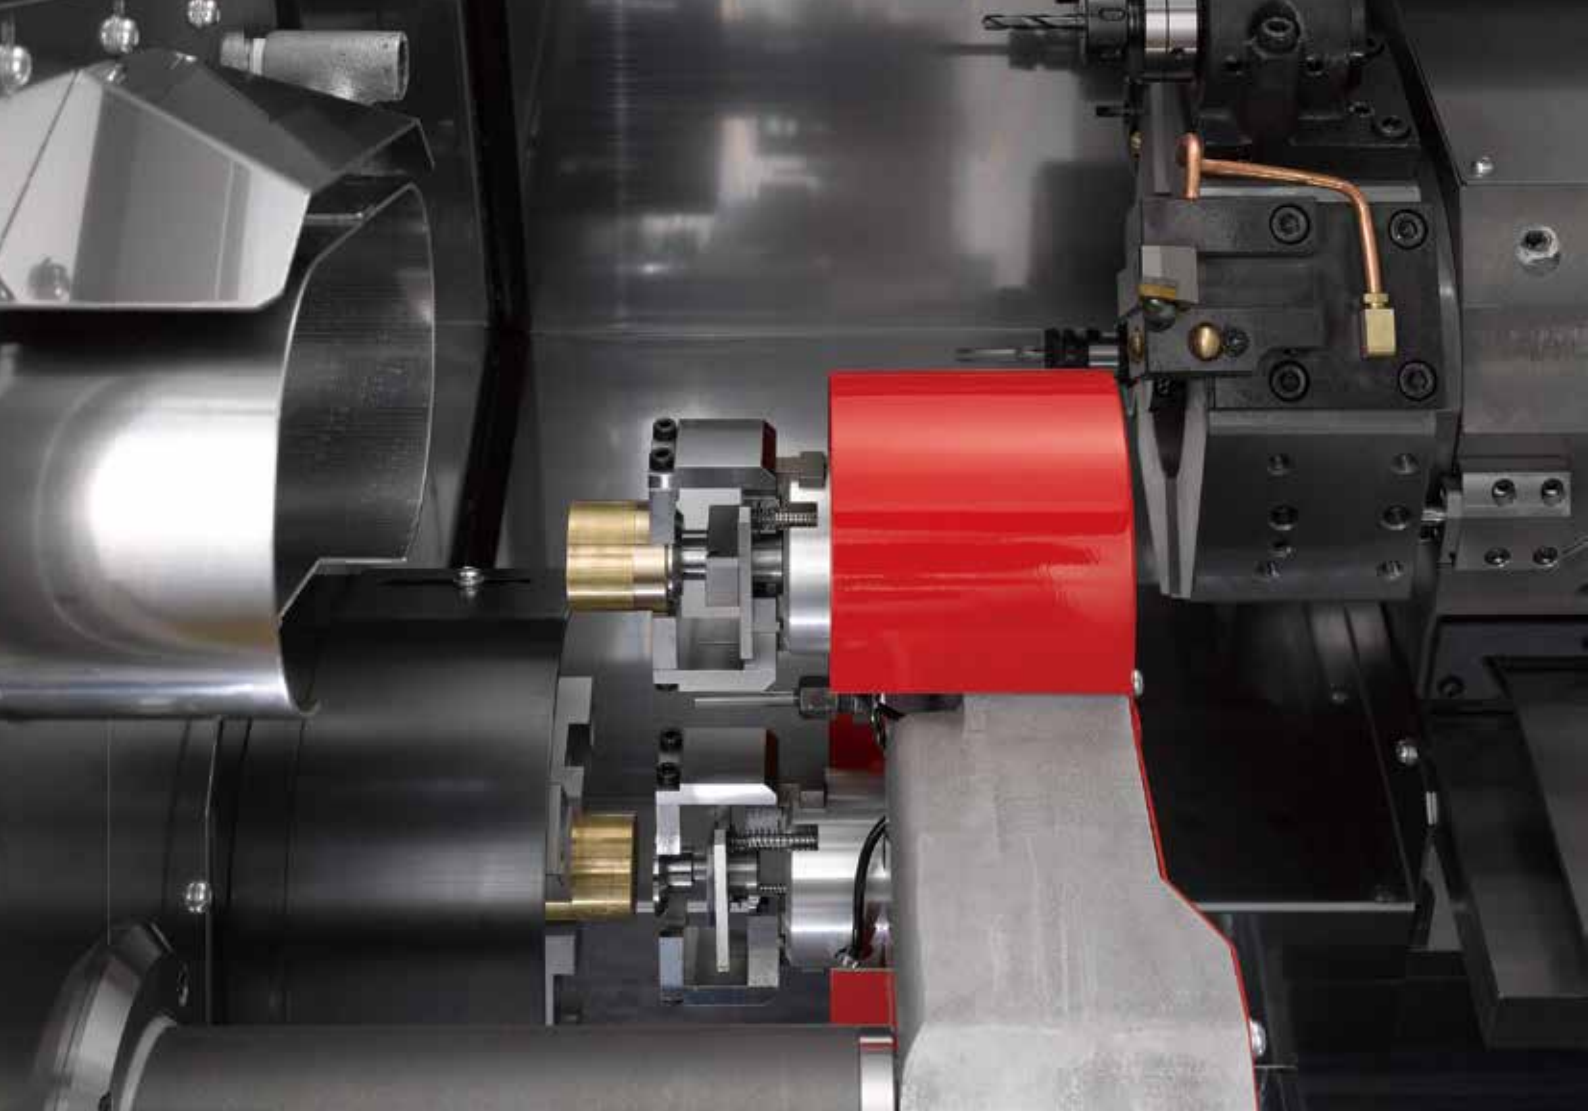

In-machine Loader **LX06E**



Loading patterns

	IN conveyor	Inverting hand, 90°	Inverting hand, 180°	Double hand loader
Flange workpiece 1	machine surface up	90° partial inversion	-	Clamps side of workpiece to be machined
Flange workpiece 2	machine surface down	90° partial inversion	180° swivel	Clamps side of workpiece to be machined

Maximum conveyable size : 70 x 60 mm Dia. (flange workpiece)
Maximum conveyable workpiece weight : 700 kg (flange workpiece)
Z axis rapid traverse : 50 m/ min
Loading time : 4.5 seconds



Gantry Loader **LX06E / LX08E**

LX06E

Maximum conveyable size	: 100 x 100 mm Dia. (flange workpiece)
Maximum conveyable workpiece weight	: 1 kg
Z axis rapid traverse	: 90 m/ min
X axis rapid traverse	: 123 m/ min
Loading time	: 13.5 seconds

LX08E



Maximum conveyable size	: 150 x 100 mm Dia. (flange workpiece)
	: 50 x 200 mm Dia. (shaft workpiece)
Maximum conveyable workpiece weight	: 2 kg
Z axis rapid traverse	: 90 m/ min
X axis rapid traverse	: 123 m/ min
Loading time	: 16 seconds

Workpiece stocker


Stage 1 loading height	: 295 mm
Stage 1 loading mass	: 12 kg
Workpiece size	: 20 to 100 mm Dia. (O.D. guide)
	: 50 to 100 mm Dia. (I.D. guide)

Single stocker (L type)

* Dimensions shown are for LX-06E3.



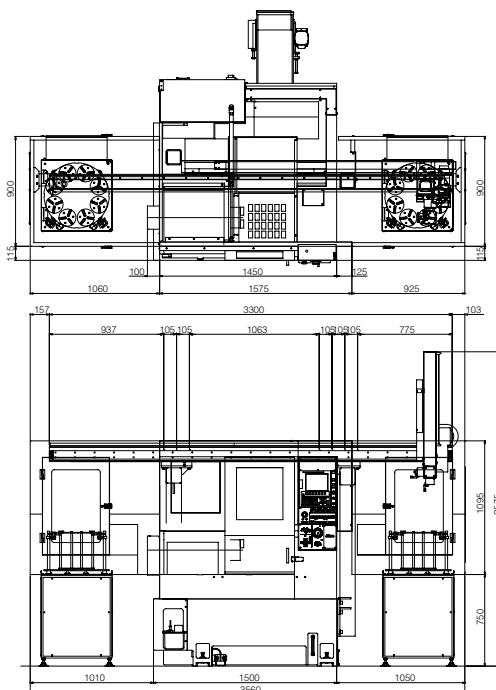
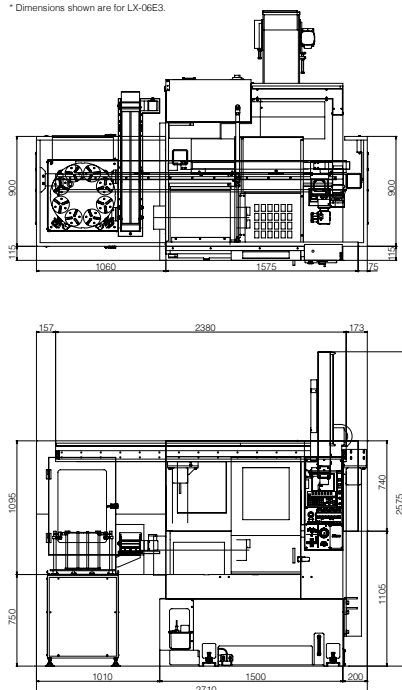


Single stocker (R type)


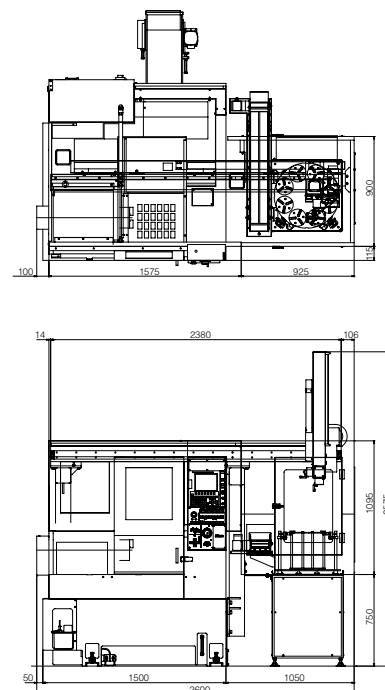


External view

Standard Specification Machine
LX06E / LX08E

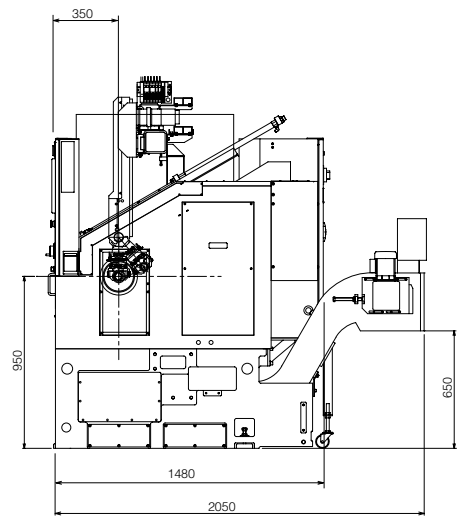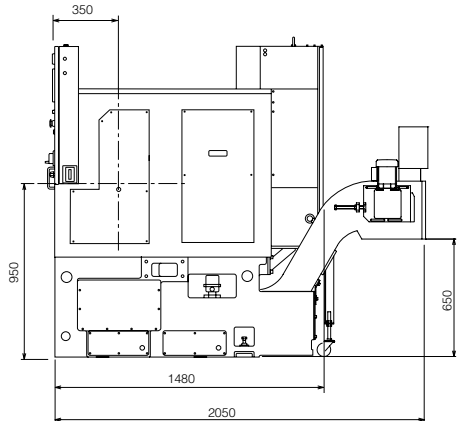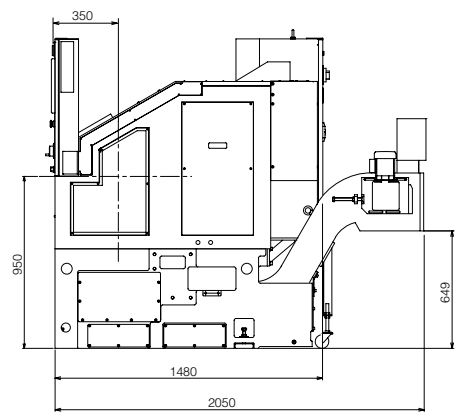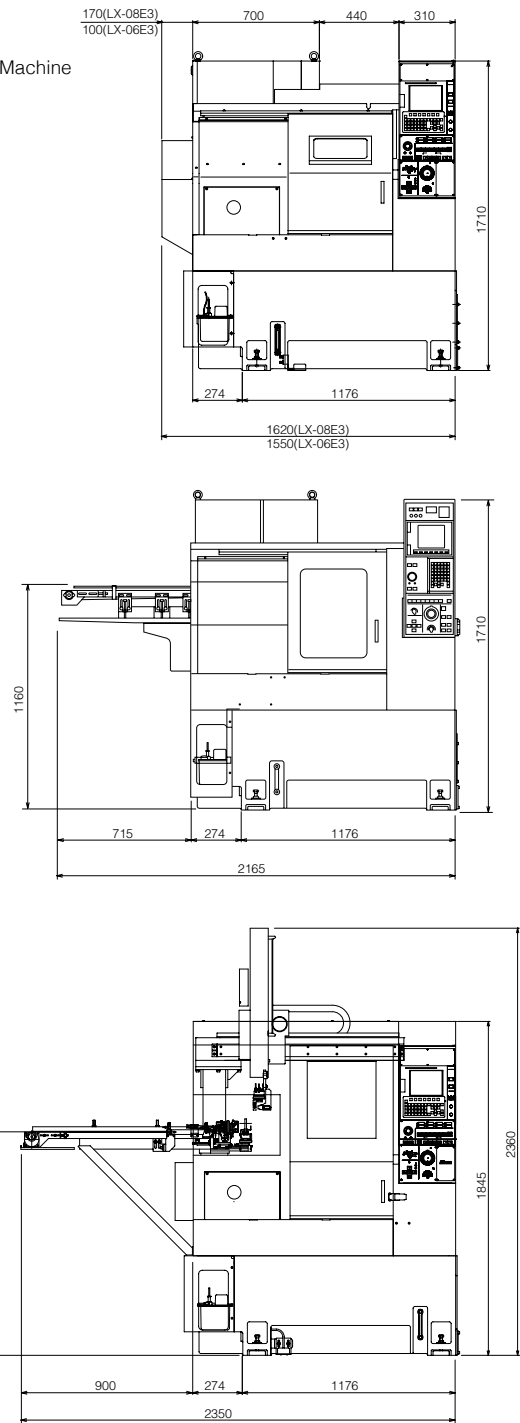

Gantry Loader
LX06E / LX08E

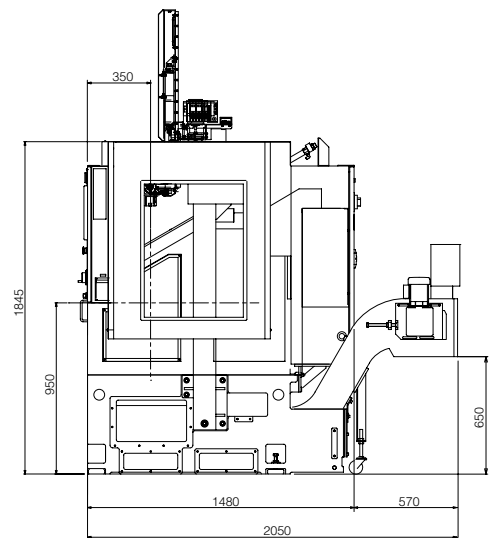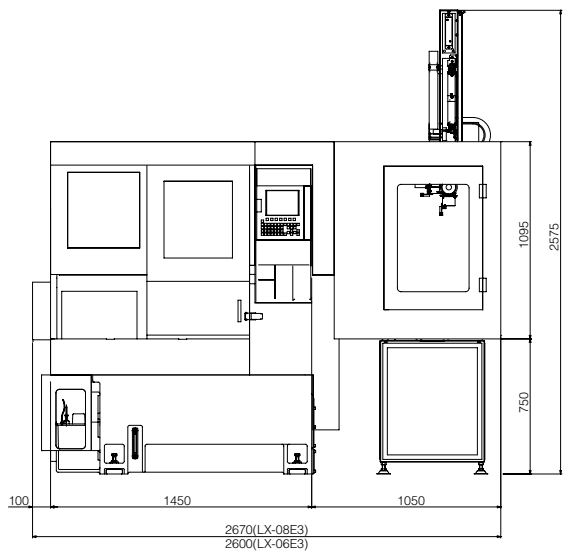

Machine specifications

Items		LX-06E3	LX-08E3
Machining capacity			
Max. work length (with Tail stock)	70(250)mm	220 mm	
Max. machining dia.		165 mm Dia.	210 mm Dia.
Spindle			
Spindle speed range		60 - 5,000 min ⁻¹	40 - 4,000 min ⁻¹
Spindle draw tube dia.		36 mm Dia.	52 mm Dia.
Type of chucking system		Hydraulic thru-hole chuck cylinder	
Collet chuck type	Stationary type	Special pad	Hardinge S22 with pad
	Pull type	Special pad	Hardinge S22 with pad
Power chuck		6"	8"
Turret			
Number of turret		1	
Type of turret		8 st. turret	
Size of turning tools		20 mm Sq.	25 mm Sq.
Size of Drill & Boring tools		32 mm Dia.	40 mm Dia.
Turret index time		0.25 sec. / 1st.	
Slide			
Slide travel	X - axis	150 mm	
	Z - axis	300 mm	
Rapid feed rate	X - axis	15 m/ min	
	Z - axis	18 m/ min	
Tailstock (Option)			
Slide type Hydraulic			
Max. slide travel		100 + 185mm (Quill + Manual)	
Live center size		MT3	
Max. slide thrust		4.9 kN/ 1.9 Mpa	
Tank capacity			
Hydraulic oil capacity		7 L	
Lubricating oil capacity		2 L	
Coolant tank capacity		180 L	
Machine dimensions			
Machine height		1,710 mm	
Floor space		1,550 mm × 1,480 mm	1,620 mm × 1,480 mm
Machine weight		2,500 kg	2,820 kg
Motors			
Spindle drive		AC 7.5 / 5.5 kW	AC 11 / 7.5 kW
Power supply			
Voltage		AC 200 V ± 10%, 50 / 60 Hz ± 1%	
Capacity		8 KVA	22 KVA
Air supply		0.5 Mpa (5 kgf / cm ²)	
Fuse		75 A	
Others			
Splash guard interlock, Machine light			
Option			
Collet system, Power chuck system, High pressure coolant, Pneumatic,			
Gantry loader, Double hand loader, Programmable NC loader, Air blow, Chip conveyor, Chip box,			
Coolant mist collector, Coolant level switch, Signal tower, Automatic power shut-off, Auto door,			
Inner coolant, Inner air blow, Tailstock.Tool setter, Sub operation switch, Total & preset counter.			

NC specifications	FANUC 0i -TD
Axial control	X, Z
Simultaneous control axis	2 axis (Positioning, Linear interpolation)
Minimum setting unit	0.001 mm
Minimum output unit	X: 0.0005 mm Z: 0.001 mm
Interpolation functions	G00, G01, G02, G03
Parts program storage capacity	512 Kbyte
Spindle function	S4 digit direct spindle speed input(G97) Constant cutting speed control(G96)
Feed	F3.4 digit feed par revolution F6 digit feed per min.
Feed rate override	0 - 50% (10 % step)
Rapid feed	X: 15 m/ min, Z: 18 m/ min
Interpolation functions	G01, G02, G03
Thread cutting	G32, G92
Canned cycle	G90, G92, G94
Tool function	TAABB (AA= Tool number and geometry, BB= Wear offset number)
Direct input of tool position	by measured MDI
Input/ output interface	PC card slot, USB memory interface,
RS232C	
Automatic operation	1cycle/ Automatic operation, Single block, Block delete, Machine lock,
	Optional block skip, Dry run, Feed hold,
Others	8.4"color LCD/MDI, Program storage capacity addition: 400, A decimal point input,
	Manual pulse generator, Memory protect, AC digital servo motor, etc.
Standard NC functions	Circle radius R command, Nose radius compensation, Constant surface speed control (G96), Background editing, Programmable date input (G10), Run hour/ aparts count display, Multiple repetitive cycles(G70-G76), Spindle rigid tap (main), Cylindrical interpolation, Custom macro B, Canned cycles for drilling(G80-G86), Tool life management.

CITIZEN MACHINERY CO., LTD.

CITIZEN	JAPAN	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5901	FAX.81-267-32-5908
	SOUTH ASIA / KOREA	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN	TEL.81-267-32-5916	FAX.81-267-32-5928
	TAIWAN	CINCOM MIYANO TAIWAN CO.,LTD. 10FL., No.174, Fuh Sing N. Rd., Taipei, TAIWAN	TEL.886-2-2715-0598	FAX.886-2-2718-3133
	CHINA	CITIZEN (CHINA) PRECISION MACHINERY CO.,LTD. 10058, XINHUA ROAD OF ZHOUCUN, ZIBO, SHANDONG, P.R. CHINA	TEL.86-533-6150560	FAX.86-533-6161379
	EUROPE-Germany	CITIZEN MACHINERY EUROPE GmbH Mettinger Strasse 11, D-73728 Esslingen, GERMANY	TEL.49-711-3906-100	FAX.49-711-3906-106
	EUROPE-UK	CITIZEN MACHINERY UK LTD 1 Park Avenue, Bushey, WD23 2DA, UK	TEL.44-1923-691500	FAX.44-1923-691599
CITIZEN	EUROPE-Italia	CITIZEN MACCHINE ITALIA s.r.l. Via Campo Romano 11/13 - 24050 Spirano (BG), ITALY	TEL.39-035-877738	FAX.39-035-876547
	AMERICA	MARUBENI CITIZEN-CINCOM INC. 40 Boroline Road Allendale, NJ 07401, U.S.A.	TEL.1-201-818-0100	FAX.1-201-818-1877

URL:<http://cmj.citizen.co.jp/>

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technology and know-how. In the event of approval, proof of approval by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN. CITIZEN is a registered trademark of Citizen Holdings Co. Japan.

PRINTED IN JAPAN JUN. 2015