

CITIZEN

Miyano

LZ01

CNC Lathe



LZ01R LZ01RY

These are high-precision chucking machines equipped with a general-purpose in-machine loader head. The loading time is shortened substantially through coordinated operation of the loader head and spindle.


By constructing the turret with a single slide in the Y axis direction only (01RY), and by assigning the X axis and the Z axis that runs on a linear guide to the spindle, both rigidity and high-speed travel are achieved.

The enriched system configuration designed based on the loader head accommodates a wide range of automation needs.





Self-Loader

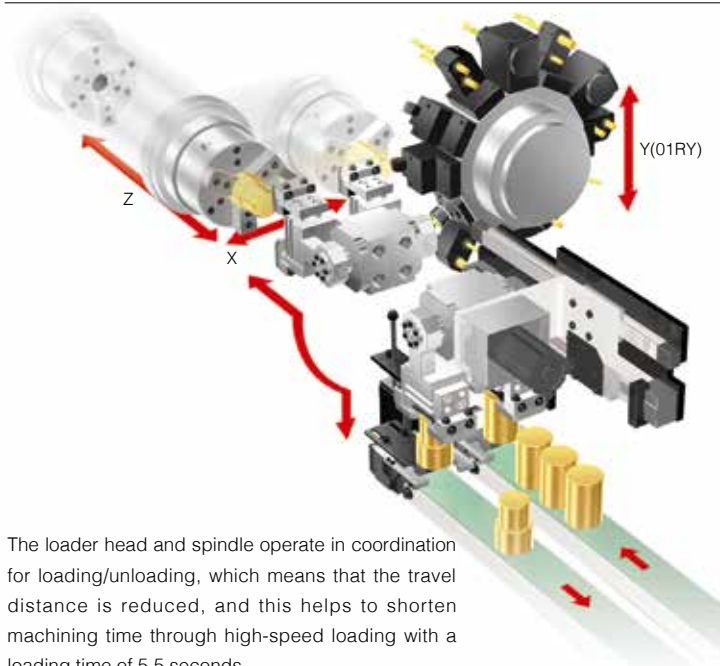

The loader head and spindle operate in coordination for loading/unloading, which means that the travel distance is reduced, and this helps to shorten machining time through high-speed loading with a loading time of 5.5 seconds.

Loader cycle



1. In the tooling zone: machining of the workpiece is completed.

2. At the loader side: the IN hand grips a blank and carries it into the tooling zone.



3. The OUT hand receives the machined workpiece.

4. The spindle moves to the position of the IN hand and receives the blank from the IN hand.

Highly Rigid Turret



Combining an original double-column type Y-axis mechanism (01RY) with a turret slide on the Y-axis only instead of having X-axis and Z-axis slides enables high-precision machining in turning work.

High-rigidity Spindle and Roller Type Linear Guide




Adopting a linear guide for the Z-axis allows increased speed, with a rapid traverse rate of 24 m/ min.


And because a roller type linear guide is used, the rigidity is equivalent to that of a square slide.

Accuracy

Roundness

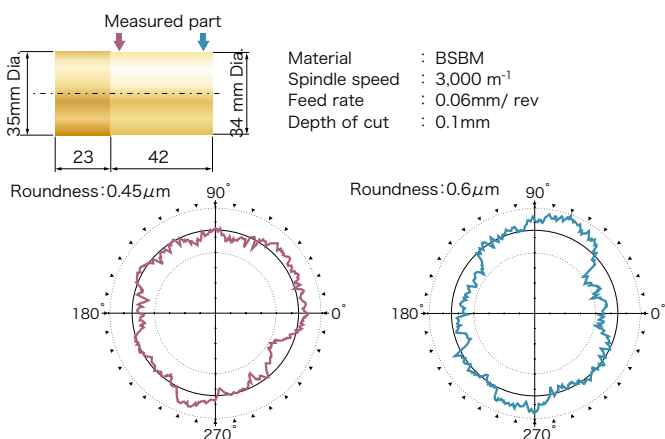


Dimensional accuracy

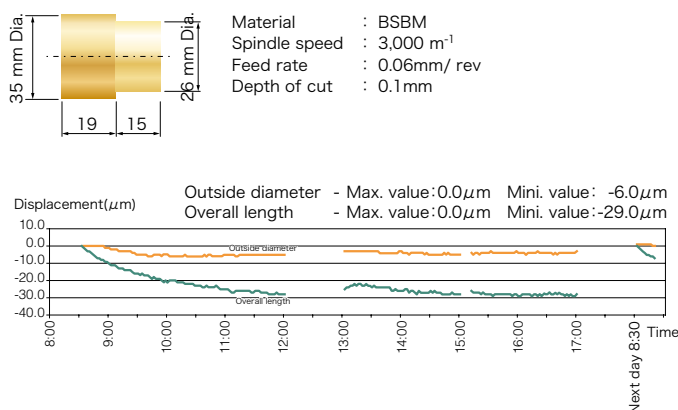

Examples of Complex Machining

Basic complex machining

By using the Y-axis, the machining time for off-center drilling and off-center tapping can be shortened. The tapping accuracy with a rigid tap is also improved. (01RY)



High precision milling

Accurate positioning by the C-axis and high precision combined machining by the Y-axis allow for a wider range of machining.(01RY)




Flat milling

Separating the machining into rough cutting and finishing improves both the accuracy and the quality of the machined surface. (01RY)




Contouring

Simultaneous 2-axis control including the C axis in combination with the X, Z or Y axis can be used for contouring. (01RY)




Polygon machining

Synchronizing the revolving tool speed with the spindle speed at two times permits polygon machining, such as two-, four- and six-sided machining, with a polygon cutter.




Automation systems


Underconveyor system (standard)

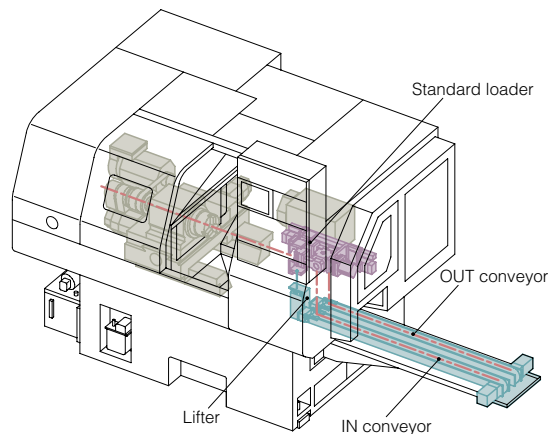


Top conveyor system (semi-standard)

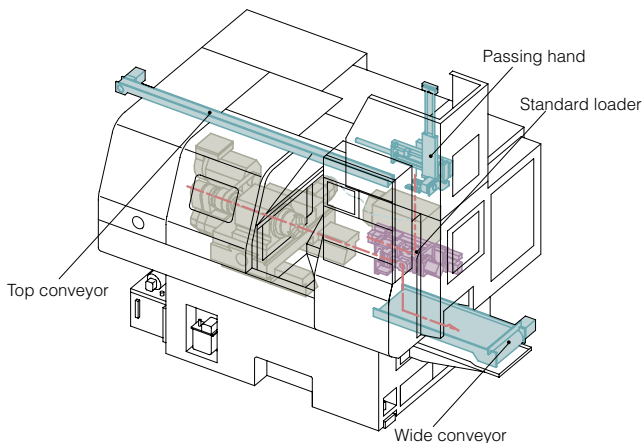


Robot stocker system (standard)

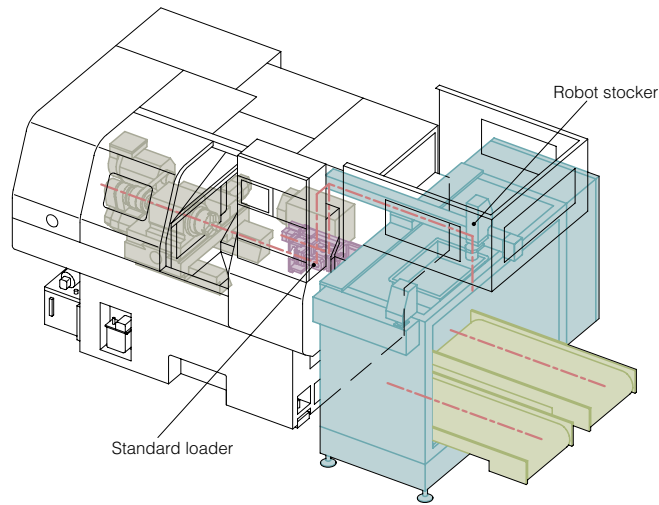

System with part feeder underneath (semi-standard)

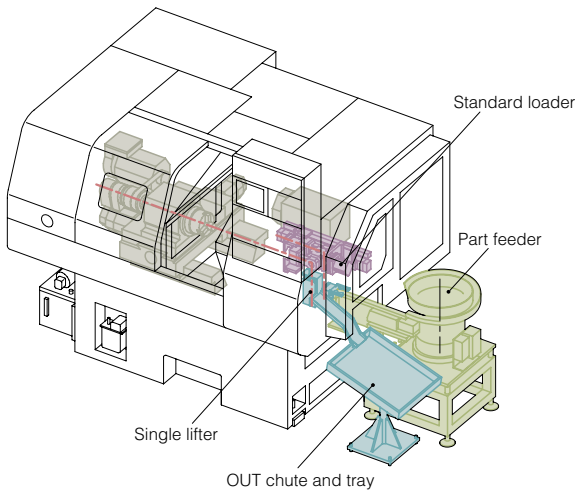

Tandem Connection Specification (Special Specification)

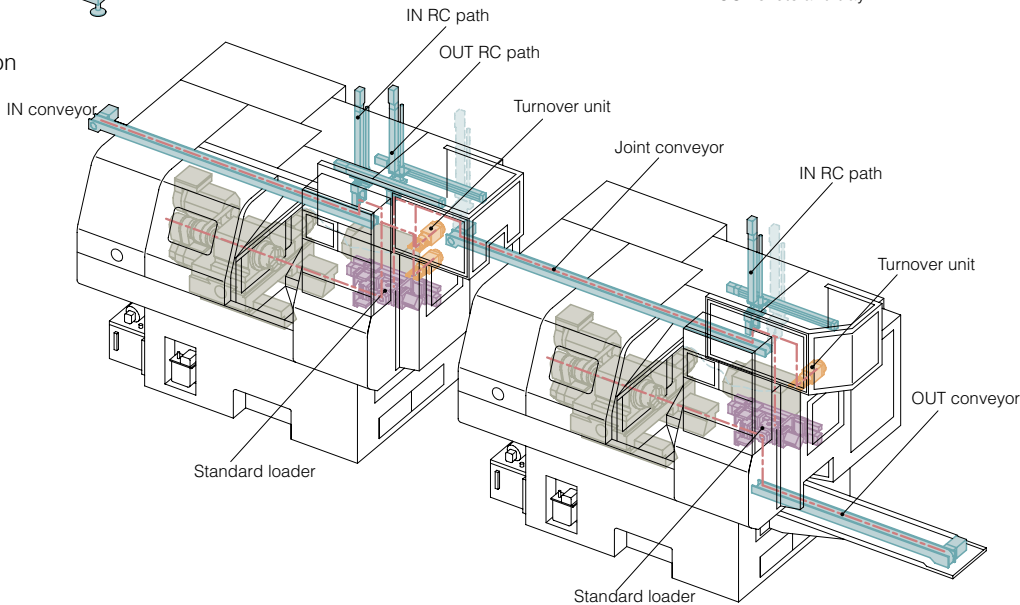


NC Custom Menu



Custom menu	Displays the list of custom screens.
-------------	--------------------------------------



Block skip
Used to set block skip 1 to block skip 9.



Tool counter	Used to set and reset the tool counter stop value and enter the tool wear offsets.
--------------	--



Cycle time
Measures the cutting time, non-cutting time and running time in each cycle.



Automatic running monitor
Displays the control status of each axis.Used to set ON / OFF for the machine lock function.



Start condition
Used to set the start conditions for automatic running.



Spindle & RVT
Used to set the rotational speed of the spindle and revolving tools.
Used to set the spindle override.



Maintenance
Used to set ON / OFF for the maintenance items.
Used to set ON / OFF for turret zero point adjustment.



C Zero point adjust mode
Easy to adjust the C axis zero point .



Turret Maintenance
Used to adjust the turret zero point.





Manual operation
Displays the zero point lamp status and the machine coordinate of each axis.




Option device
Used to select an auxiliary device such as a spindle brake to be operated manually.


Tooling area

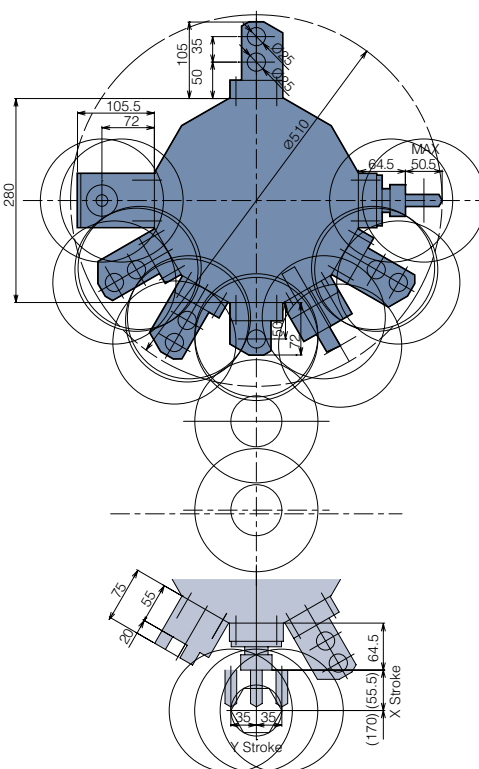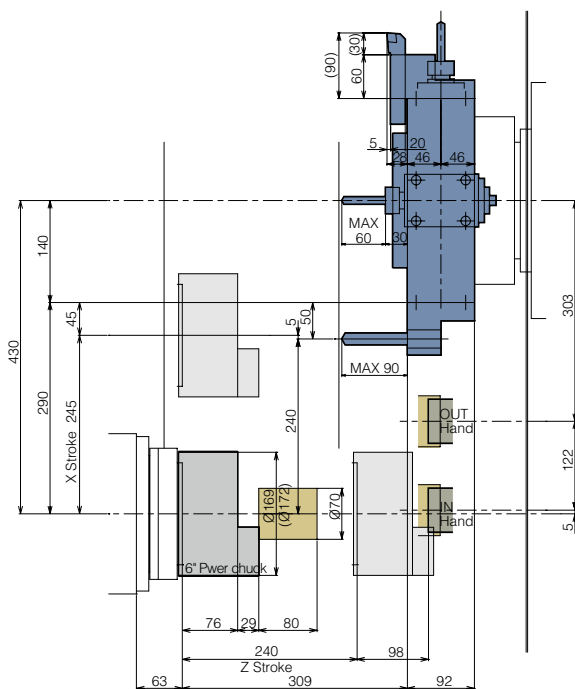

Tooling system

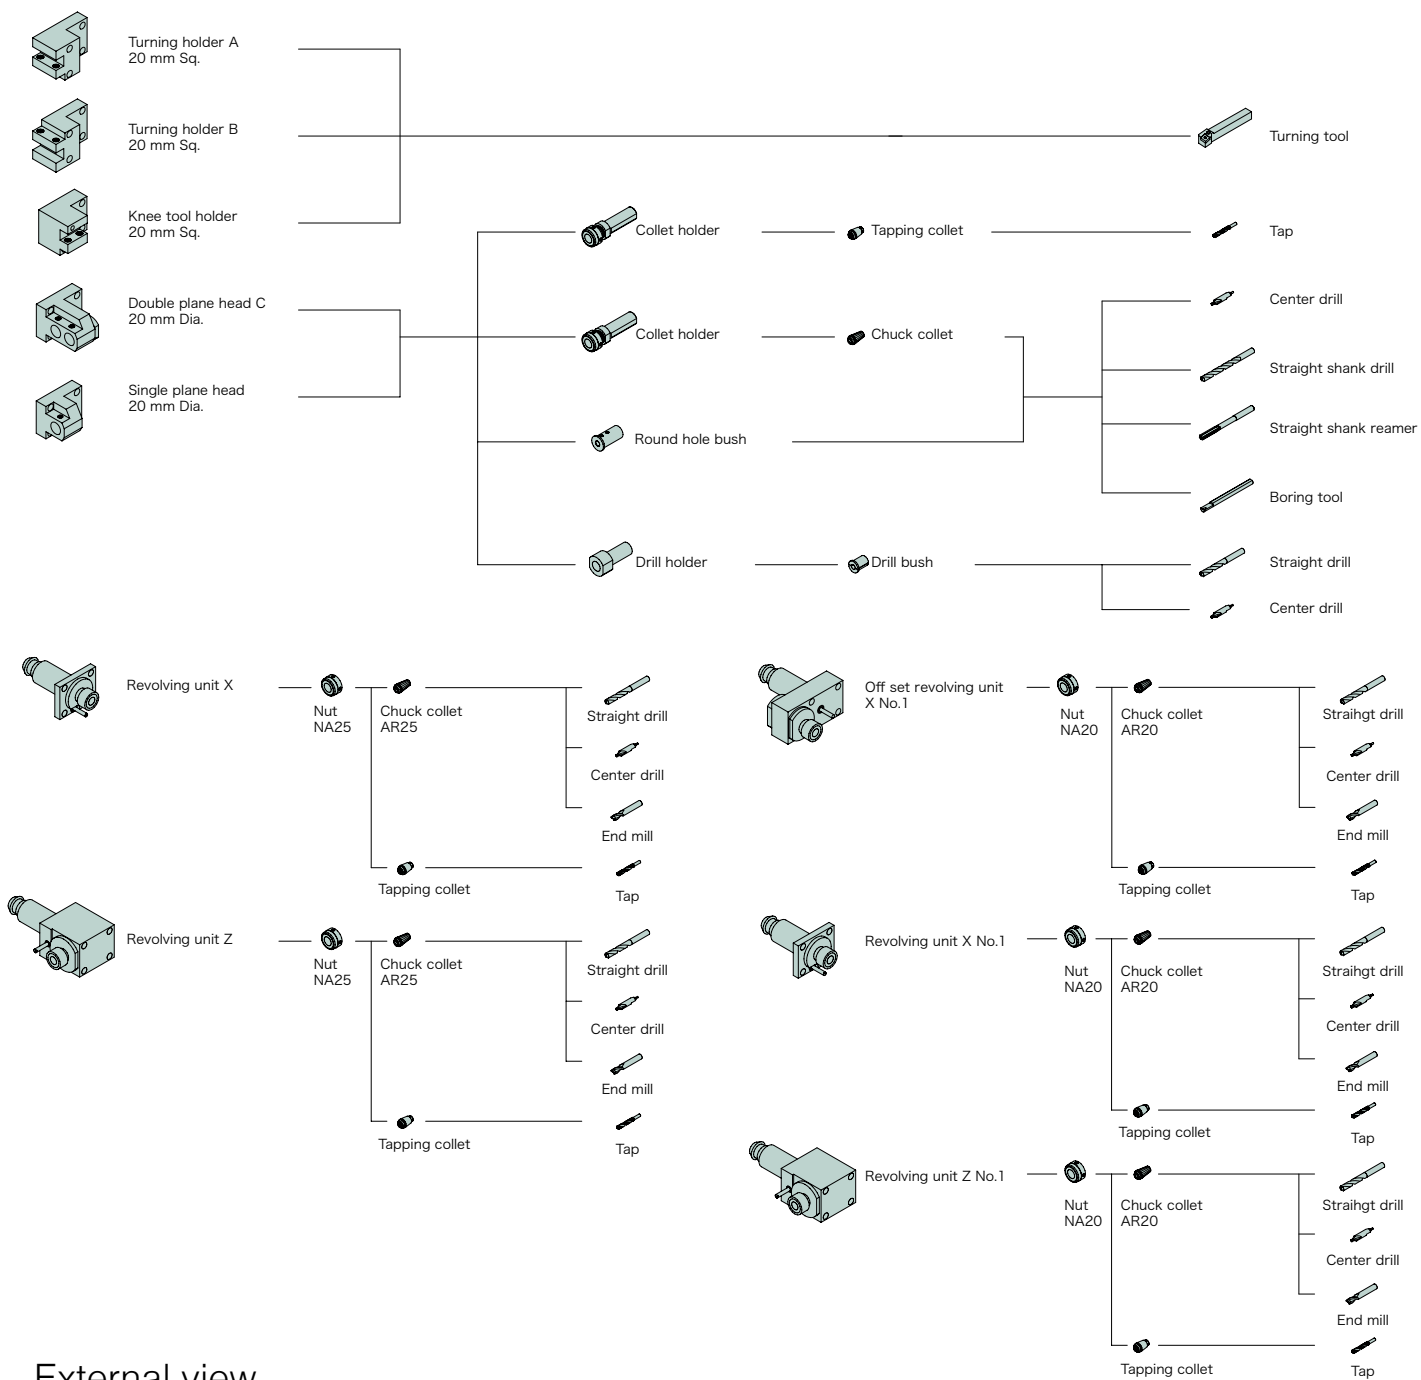

External view

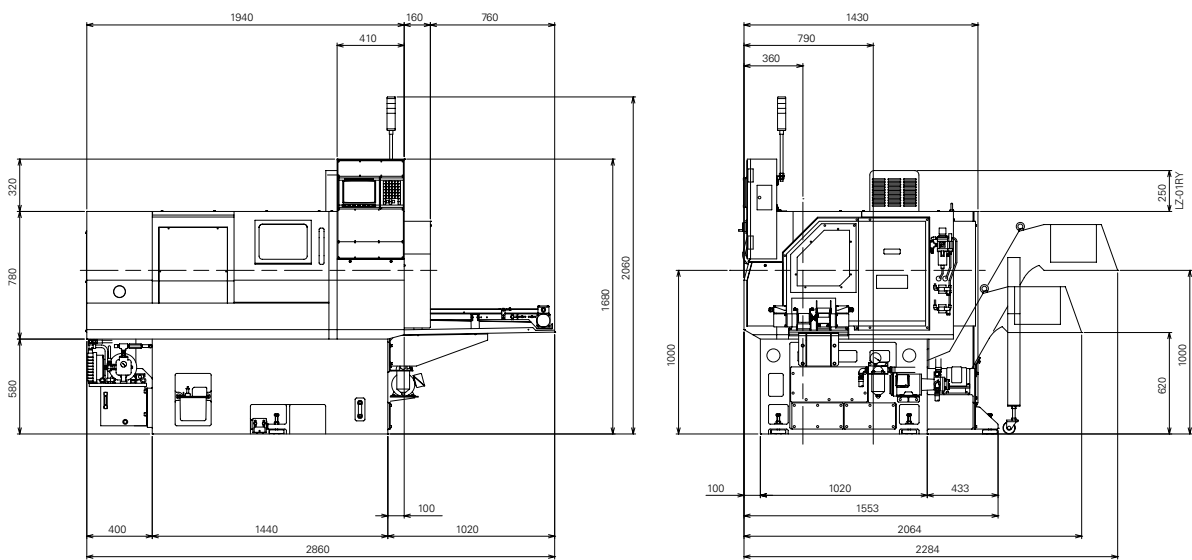

Machine specifications

Item		LZ-01R2	LZ-01RY2
Machining capacity			
Maximum work length		80 mm	
Maximum blank diameter	Power chuck	70 mm Dia	
	Collet chuck	50 mm Dia	
Spindle			
Number of spindle		1	
Spindle speed range		60 - 6,000 min ⁻¹	
Inner diameter of draw tube		32 mm Dia	
Chucking system		Hydraulic cylinder	
Type of collet chuck		Spring collet chuck	
Power chuck size and type		6" Hydraulic chuck	
Turret			
Number of turret		1	
Turret stations		12 st.	
Tool shank size		20 mm Sq.	
I.D tool hole size		25 mm Dia.	
Index time		0.2 sec./ 1 pos.	
Slide			
Slide stroke	X-axis	245 mm	
	Z-axis	240 mm	
	Y-axis	---	± 35 mm
Rapid traverse rate	X-axis	20 m/ min.	
	Z-axis	24 m/ min.	
	Y-axis	---	12.5 m/ min.
Revolving tool			
Number of revolving tool		MAX.6	
Spindle speed range		100 - 4,000min ⁻¹	
Machining capacity	Drilling	MAX.13 mm Dia	
	Tapping	MAX. M8 × 1.25	
Tank capacity			
Hydraulic tank capacity		17 L	
Lubricating tank capacity		2 L	
Coolant tank capacity		140 L	
Machine demensions			
Machine Height		1,680 mm	
Floor space		2,100 mm × 1,555 mm	
Machine weight		3,600 kg	4,000 kg
Motors			
Spindle motor		50%ED/Cont.	7.5/ 5.5
Revolving tool motor		2.5 kW	
Power supply			
Voltage		AC 200V ±10%, 50/ 60 Hz ±1HZ	
Capacity		19 KVA	20 KVA
Air supply		0.5 MPa (5kgf / cm ²)	
Fuse		75A	
Loader specification			
Hands type		Double hands	
Max. work size		70 × 80 mm Dia	
Min. work size		10 × 10 mm Dia	
Max. work weight		0.7 kg × 2	
Servicing time		6.0 sec	
Control & driving method		PMC & air operating	
Others			
Transfer detecting device, Tool compensation number:64, Cs-axis drive unit,			
Splashguard interlock, Revolving tool drive (LZ-01RY2), Pneumatic system, High-pressure coolant			
Options			
Loader cover, Turn unit, Top conveyor, Out shoot & tray, Upper pass hand, Out shute & conveyor,			
Out under conbeyor, Pass bracket, Full set of pads, Loader, Auto shutter, Single lifter, Double lifter,			
Under conveyor, Collet chuck, Power chuck, Spindle brake, Air blow, Spindle inner air blow,			
Automatic fire extinguisher, Auto power shut-off, Coolant level switch, Inner high-pressure coolant,			
Chip conveyor, Chip box, Total & preset counter, Coolant mist collector, Oil mist dumper,			
Signal light, Revolving tool drive (LZ-01R2), 100V, RS232C.			

NC specifications	FANUC 0i-TD
Axis controlled	LZ-01R2 : X, Z, C, A (Option)
	LZ-01RY2 : X, Z, Y, C, A
Number of simultaneous control axes	4 axis
Min. input incremental	0.001 mm, 0.001deg.
Min. output resolution	X axis: 0.0005mm, Z axis: 0.001mm
Part program storage	512 kbyte (1,280m)
Spindle function	S4 digit (G97),
	Constant surface speed control (G96)
Feed rate	F3.4 mm/ rev, F6 mm/ min
Feed rate override	0 - 150% (10% Step)
Interpolation functions	G00, G01, G02, G03
Thread cutting	G32, G92
Canned cycles	G90, G92, G94
Tool function	Taabb
	(aa=Tool number and geometry, bb=Wear offset number)
Tool position direct input function	by measured MDI
Input/output interface	Memory card,USB,
Autmatic operation	1cycle/Automatic operation, Single block,
	Block delete, Machine lock,
Others	Optional block skip, Dry run, Feed hold
	8.4" color LCD/ MDI,
	Program storage capacity addition: 400 pieces,
	A decimal point input, Manual pulse generator,
	Memory protect,
	The circle radius R command,
NC standard function	Nose radius compensation,
	Constant surface speed control (G96),
	Back ground editing,
	Programmable date input (G10),
	Run hour/Parts count display,
	Polar coordinate interpolation,
	Multiple repetitive cycles (G70 - G76),
	Rigid tap, Cylindrical interpolation,
	Custom macro,
	Canned cycles for drilling (G80 - G86)
	Tool life management.
	Helical interpolation.
NC option	

CITIZEN MACHINERY CO., LTD.

CITIZEN

JAPAN	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN
SOUTH ASIA / KOREA	CITIZEN MACHINERY CO.,LTD. 4107-6 Miyota, Miyota-machi, Kitasaku-gun, Nagano-ken, 389-0206, JAPAN
TAIWAN	CINCOM MIYANO TAIWAN CO.,LTD. 10Fl., No.174, Fuh Sing N. Rd., Taipei, TAIWAN
CHINA	CITIZEN (CHINA) PRECISION MACHINERY CO.,LTD. 10058, XINHUA ROAD OF ZHOUCUN, ZIBO, SHANDONG, PR, CHINA
EUROPE-Germany	CITIZEN MACHINERY EUROPE GmbH Mettinger Strasse 11, D-73728 Esslingen, GERMANY
EUROPE-UK	CITIZEN MACHINERY UK LTD 1 Park Avenue, Bushey, WD23 2DA, UK
EUROPE-Italia	CITIZEN MACCHINE ITALIA s.r.l. Via Campo Romano 11/13 - 24050 Spirano (BG), ITALY
AMERICA	MARUBENI CITIZEN-CINCOM INC. 40 Boroline Road Allendale, NJ 07401, U.S.A.

TEL.81-267-32-5901	FAX.81-267-32-5908
TEL.81-267-32-5916	FAX.81-267-32-5928
TEL.886-2-2715-0598	FAX.886-2-2718-3133
TEL.86-533-6150560	FAX.86-533-6161379
TEL.49-711-3906-100	FAX.49-711-3906-106
TEL.44-1923-691500	FAX.44-1923-691599
TEL.39-035-877738	FAX.39-035-876547
TEL.1-201-818-0100	FAX.1-201-818-1877

URL:<http://cmj.citizen.co.jp/>

All specifications are subject to change without prior notice. This product is an export control item subject to the foreign exchange and foreign trade act. Thus, before exporting this product, or taking it overseas, contact your CITIZEN machine dealer. Please inform your CITIZEN machine dealer in advance of your intention to re-sell, export or relocate this product. For the avoidance of doubt products includes whole or part, replica or copy, technologies and software. In the event of export, proof of approval to export by government or regulatory authority must be evidenced to CITIZEN. You can operate the machines after the confirmation of CITIZEN.